



จอมอนิเตอร์แอลอีดี  
**VG3456**


## ดีย์ คุณสมบัติ

- WQHD for incredible visuals
- Integrated USB TypeC and Ethernet
- Ergonomic flexibility with quick release stand
- vDisplay Manager software for multitasking
- Lower total cost of ownership



## สินค้า รายละเอียด

The ViewSonic VG56 docking monitor series will keep the workstation tidy and productive with USB Type-C and Ethernet connectivity that turn your monitor into a hub for charging, data, network, and devices, while reducing clutter on your desk and simplifying cable management. With a 34" WQHD display that delivers larger and stunning visuals, the VG3456 monitor expands your productivity, especially if you work in graphic design or software engineering. A range of ergonomic features such as 40-degree tilt, swivel, and height adjustment, along with eye-care technology let you stay comfortable at work all day. In addition, the supported vDisplay Manager software for multi-tasking provides efficient on-screen display control. The monitor and quick release stand ship in an eco-friendly, biodegradable package, thus minimizing total cost of ownership.

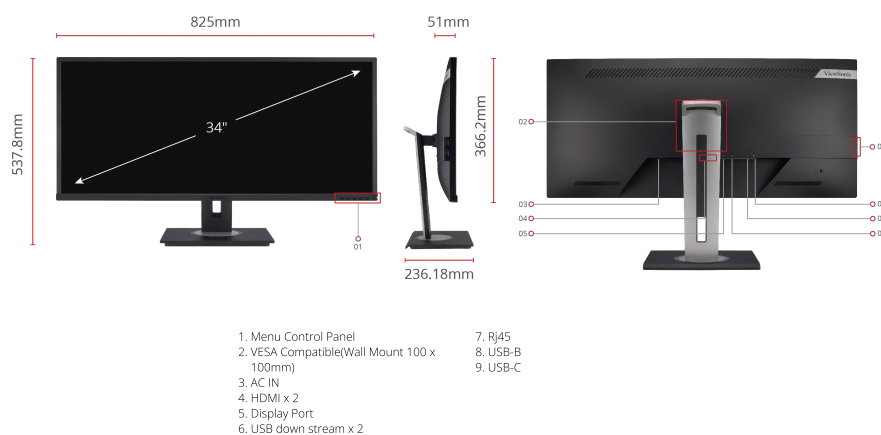

เยี่ยมชม เรา

[www.viewsonic.com](http://www.viewsonic.com)

| DISPLAY                           |  |
|-----------------------------------|--|
| Display Size (in.):               | 34   |
| Viewable Area (in.):              | 34.1   |
| Panel Type:                       | VA Technology  |
| Resolution:                       | 3440 x 1440  |
| Resolution Type:                  | UWQHD (UltraWide QHD)  |
| Static Contrast Ratio:            | 3,000:1 (typ)  |
| Dynamic Contrast Ratio:           | 50M:1  |
| Light Source:                     | LED  |
| Brightness:                       | 300 cd/m² (typ)  |
| Colors:                           | 1.07B  |
| Color Space Support:              | 10 bit (8 bit + FRC)   |
| Aspect Ratio:                     | 21:9   |
| Response Time (Typical GTG):      | 5ms  |
| Response Time (GTG w/OD):         | 5ms  |
| Response Time (Typical Tr+Tf):    | 25ms   |
| Viewing Angles:                   | 178° horizontal, 178° vertical   |
| Backlight Life (Hours):           | 40000 Hrs (Min)  |
| Curvature:                        | Flat   |
| Refresh Rate (Hz):                | 60   |
| Variable Refresh Rate Technology: | FreeSync   |
| Low Blue Light:                   | Software solution  |
| Flicker-Free:                     | Yes  |
| Color Gamut:                      | Adobe RGB: 79% size / 74% coverage (Typ) NTSC: 72% size (Typ) sRGB: 106% size / 95% coverage (Typ) |
| Pixel Size:                       | 0.233 mm (H) x 0.233 mm (V)  |
| Surface Treatment:                | Anti-Glare, Hard Coating (3H)  |

COMPATIBILITY

|                        |  |
|------------------------|--|
| PC Resolution (max):   | 3440x1440                                  |
| Mac® Resolution (max): | 3440x1440                                  |
| PC Operating System:   | Windows 7/8/8.1/10 certified; macOS tested |
| Mac® Resolution (min): | 3440x1440                                  |

CONNECTOR

|  |                                |
|--|--------------------------------|
| USB 3.2 Type A Down Stream:                      | 2                              |
| USB 3.2 Type B Up Stream:                        | 1                              |
| USB 3.2 Type C Up Stream; DisplayPort Alt mode : | 1 (90W power charger)          |
| HDMI 1.4:  | 2                              |
| DisplayPort:                                     | 1                              |
| Power in:  | 3-pin Socket (IEC C14 / CEE22) |
| Ethernet LAN (RJ45):                             | 1                              |

AUDIO

|                    |           |
|--------------------|-----------|
| Internal Speakers: | 3Watts x2 |
|--------------------|-----------|

POWER

|                        |                       |
|------------------------|-----------------------|
| Eco Mode (Conserve):   | 30W                   |
| Eco Mode (optimized):  | 32W                   |
| Consumption (typical): | 35W                   |
| Consumption (max):     | 46W                   |
| Voltage:               | AC 100-240V           |
| Stand-by:              | 0.3W                  |
| Power Supply:          | Internal Power Supply |

ADDITIONAL HARDWARE

|                       |     |
|-----------------------|-----|
| Kensington Lock Slot: | 1   |
| Cable Organization:   | Yes |

CONTROLS

|                    |   |
|--------------------|---|
| Physical Controls: | Key 1 (eye), Key 2, Key 3, Key 4, Key 5, Key 6 (power)                              |
| On Screen Display: | Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu |

OPERATING CONDITIONS

|                            |                             |
|----------------------------|-----------------------------|
| Temperature:               | 32°F to 104°F (0°C to 40°C) |
| Humidity (non-condensing): | 20% to 90%                  |

WALL MOUNT

|                  |              |
|------------------|--------------|
| VESA Compatible: | 100 x 100 mm |
|------------------|--------------|

INPUT SIGNAL

|                       |             |
|-----------------------|-------------|
| Frequency Horizontal: | 15 ~ 150KHz |
| Frequency Vertical:   | 24 ~ 100Hz  |

VIDEO INPUT

|               |   |
|---------------|---|
| Digital Sync: | TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.2), Micro-Packet - Type C |
|---------------|---|

ERGONOMICS

|                      |           |
|----------------------|-----------|
| Height Adjust (mm):  | 130       |
| Swivel:              | 120°      |
| Tilt (Forward/Back): | -5° / 40° |

WEIGHT (IMPERIAL)

|                          |      |
|--------------------------|------|
| Net (lbs):               | 19.4 |
| Net Without Stand (lbs): | 13.5 |
| Gross (lbs):             | 29.5 |

WEIGHT (METRIC)

|                         |      |
|-------------------------|------|
| Net (kg):               | 8.8  |
| Net Without Stand (kg): | 6.1  |
| Gross (kg):             | 13.4 |

DIMENSIONS (IMPERIAL) (WXHxD)

|                               |                          |
|-------------------------------|--------------------------|
| Packaging (in.):              | 37.2 x 20.7 x 9.2        |
| Physical (in.):               | 32.5 x 16.07~21.19 x 9.3 |
| Physical Without Stand (in.): | 32.5 x 14.4 x 2          |

DIMENSIONS (METRIC) (WXHxD)

|                              |                         |
|------------------------------|-------------------------|
| Packaging (mm):              | 945 x 525 x 234         |
| Physical (mm):               | 825 x 407.8~537.8 x 236 |
| Physical Without Stand (mm): | 825 x 366 x 51          |

GENERAL

|                   |  |
|-------------------|--|
| Regulations:      | cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UKrSEPRO, RCM  |
| PACKAGE CONTENTS: | VG3456 x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v1.4; Male-Male) x1, USB Type-C Cable (Male-Male) x1, USB A/B Cable (v3.2; Male-Male) x1, Quick Start Guide x1 |
| Recycle/Disposal: | Please dispose of in accordance with local, state or federal laws.   |
| Warranty:         | *Warranty offered may differ from market to market   |
| Power Management: | Energy Star standards, EPEAT   |