




# HPE FLEXNETWORK 5510 HI SWITCH SERIES

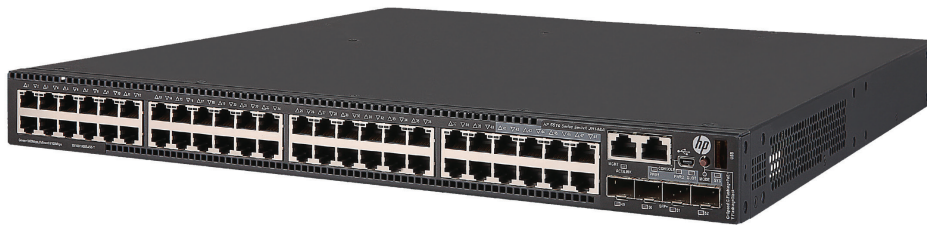

## KEY FEATURES

- Scalable with 10 Gigabit uplinks and 9-chassis IRF with up to 160 Gbps stacking bandwidth
- 40G QSFP+ ports for uplink or stacking
- Four convenient built-in SFP+ 10GbE uplinks provide performance for bandwidth hungry applications
- PoE+ for up to 30W of PoE power per port on all ports simultaneously
- MACsec support

## PRODUCT OVERVIEW

The HPE FlexNetwork 5510 HI Switch Series comprises Gigabit Ethernet switches that deliver resiliency, security, and multiservice support capabilities at the edge layer of data center, large campus, and metro Ethernet networks.

With Intelligent Resilient Fabric (IRF) support and available dual power supplies, the HPE FlexNetwork 5510 HI Series Switch can deliver high levels of resiliency and manageability. In addition, the PoE+ models provide up to 1440W of PoE+ power with the dual power supply configuration.

Designed with four fixed 10GbE ports and supports additional modular uplinks, these switches can provide up to six 10GbE uplink ports. With complete IPv4/IPv6, OpenFlow, and MPLS/VPLS features, the series provides investment protection with an easy transition from IPv4 to IPv6 networks.

## FEATURES AND BENEFITS

### Software-defined networking

- OpenFlow

Supports OpenFlow 1.3 specification to enable SDN by allowing separation of the data (packet forwarding) and control (routing decision) paths

### Quality of Service (QoS)

- Advanced classifier-based QoS

Classifies traffic using multiple match criteria based on Layer 2, 3, and 4 information; applies QoS policies such as setting priority level and rate limit to selected traffic on a per-port or per-VLAN basis

- Traffic policing

Supports Committed Access Rate (CAR) and line rate

- Powerful QoS feature

Creates traffic classes based on access control lists (ACLs), IEEE 802.1p precedence, IP, and DSCP or Type of Service (ToS) precedence; supports filter, redirect, mirror, or remark; supports the following congestion actions: strict priority (SP) queuing, weighted round robin (WRR), weighted fair queuing (WFQ), weighted random early discard (WRED), weighted deficit round robin (WDRR), SP+WDRR, and SP+WFQ

- Storm restraint

Allows limitation of broadcast, multicast, and unknown unicast traffic rate to reduce unwanted broadcast traffic on the network

- Broadcast control

Allows limitations of broadcast traffic rate to cut down on unwanted network broadcast traffic

### Management

- Friendly port names

Allows assignment of descriptive names to ports

- sFlow® (RFC 3176)

Provides scalable ASIC-based wire-speed network monitoring and accounting with no impact on network performance; this allows network operators to gather a variety of sophisticated network statistics and information for capacity planning and real-time network monitoring purposes

- Complete session logging

Provides detailed information for problem identification and resolution

- Remote configuration and management

Enables configuration and management through a CLI located on a remote device

- Manager and operator privilege levels

Provides read-only (operator) and read/write (manager) access on CLI management interface

- Management VLAN

Segments traffic to and from management interfaces, including CLI/Telnet and SNMP



- Command authorization

Leverages RADIUS/HWTACACS to link a custom list of CLI commands to an individual network administrator's login; also provides an audit trail

- Remote monitoring (RMON)

Uses standard SNMP to monitor essential network functions; supports events, alarm, history, and statistics group plus a private alarm extension group

- Multiple configuration

Files store easily to the flash image

- Remote intelligent mirroring

Mirrors ingress/egress ACL-selected traffic from a switch port or VLAN to a local or remote switch port anywhere on the network

- In-service software upgrade (ISSU)

Enables operators to perform upgrades in the shortest possible amount of time with reduced risk to network operations or traffic disruptions

- Network Management

SNMPv1/v2c/v3, MIB-II with Traps, and RADIUS Authentication Client MIB (RFC 2618); embedded HTML management tool with secure access

- IPv6 management

Provides future-proof networking because the switch is capable of being managed whether the attached network is running IPv4 or IPv6; supports pingv6, tracertv6, Telnetv6, TFTPv6, DNSv6, syslogv6, FTPv6, SNMPv6, DHCPv6, and RADIUS for IPv6

- Troubleshooting

Ingress and egress port monitoring enables network problem solving; virtual cable tests provide visibility into cable problems

- HPE Intelligent Management Center (IMC)

Integrates fault management, element configuration, and network monitoring from a central vantage point; built-in support for third-party devices enables network administrators to centrally manage all network elements with a variety of automated tasks, including discovery, categorization, baseline configurations, and software images; the software also provides configuration comparison tools, version tracking, change alerts, and more

### Connectivity

- Auto-MDIX

Automatically adjusts for straight-through or crossover cables on all 10/100/1000 port

- Packet storm protection

Protects against broadcast, multicast, or unicast storms with user-defined thresholds

- Ethernet operations, administration, and maintenance (OAM)

Detects data link layer problems that occurred in the "last mile" using the IEEE 802.3ah OAM standard; monitors the status of the link between two devices

- Flow Control

Provides back pressure using standard IEEE 802.3x, reducing congestion in heavy traffic situations



- Fixed 10GbE ports

Provides four fixed SFP+ ports for a 20GbE connection to the network without the need for additional extension interface modules

- Optional 10GbE or 40GbE ports

Deliver, through the use of optional modules, additional 10GbE or 40GbE connections, which are available for uplinks or high-bandwidth server connections; flexibly support copper, SFP+, or 40GbE QSFP+ connections

- Jumbo packet support

Supports up to 10000-byte frame size to improve the performance of large data transfers

- IEEE 802.3at Power over Ethernet (PoE+)

Provides up to 30W per port that allows support of the latest PoE+-capable devices such as IP phones, wireless access points, and security cameras, as well as any IEEE 802.3af-compliant end device; eliminates the cost of additional electrical cabling and circuits that would otherwise be necessary in IP phone and WLAN deployments

### Performance

- Hardware-based wire-speed access control lists (ACLs)

Help provide high levels of security and ease of administration without impacting network performance with a feature-rich TCAM-based ACL implementation

- Non-blocking architecture

Delivers up to 336 Gbps of wire-speed switching with a non-blocking switching fabric and up to 250 million pps throughput

### Resiliency and high availability

- Separate data and control paths

Separates control from services and keeps service processing isolated; increases security and performance

- Device Link Detection Protocol (DLDP)

Monitors link connectivity and shuts down ports at both ends if unidirectional traffic is detected, preventing loops in STP-based networks

- Intelligent Resilient Fabric (IRF)

Creates virtual resilient switching fabrics, where two to nine switches perform as a single L2 switch and L3 router; switches do not have to be co-located and can be part of a disaster-recovery system; servers or switches can be attached using standard LACP for automatic load balancing and high availability; can eliminate need for complex protocols like Spanning Tree Protocol, Equal-Cost Multipath (ECMP), or VRRP, thereby simplifying network operations

- Rapid Ring Protection Protocol (RRPP)

Connects multiple switches in a high-performance ring using standard Ethernet technology; traffic can be rerouted around the ring in less than 50 ms, reducing the impact on traffic and applications

- Smart Link

Allows under 100 ms failover between links

- Virtual Router Redundancy Protocol (VRRP)

Allows groups of two routers to dynamically back each other up to create highly available routed environments



- IRF capability

Provides single IP address management for a resilient virtual switching fabric of up to nine switches using up to 160 Gbps bidirectional using QSFP+ links

- Spanning Tree/PVST+, MSTP, RSTP

Provides redundant links while preventing network loops

- Internal Dual-Redundant Power Supply

Provides high reliability by keeping network up while delivering up to 1440W of PoE+

### **Manageability**

- Dual-flash images

Provides independent primary and secondary operating system files for backup while upgrading

- Multiple configuration files

Allow multiple configuration files to be stored to a flash image

- Troubleshooting

Allows ingress and egress port monitoring, enabling network problem solving; virtual cable tests provide visibility into cable problems

- IPv6 management

Future-proofs networking, as the switch is capable of being managed whether the attached network is running IPv4 or IPv6; supports pingv6, tracertv6, Telnetv6, TFTPv6, DNSv6, and ARPv6

### **Layer 2 switching**

- GARP VLAN Registration Protocol

Allows automatic learning and dynamic assignment of VLANs

- IP multicast snooping and data-driven IGMP

Automatically prevents flooding of IP multicast traffic

- Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) protocol snooping

Controls and manages the flooding of multicast packets in a Layer 2 network

- 32K MAC addresses

Provide access to many Layer 2 devices

- IEEE 802.1ad QinQ and selective QinQ

Increase the scalability of an Ethernet network by providing a hierarchical structure; connect multiple LANs on a high-speed campus or metro network

- 10GbE port aggregation

Allows grouping of ports to increase overall data throughput to a remote device

- Spanning Tree/MSTP, RSTP, and STP root guard

Prevent network loops

- 64 MSTP instances

Allow multiple configurations of STP per VLAN group

- Isolation at data link layer with private VLANs

Provides, through a two-tier VLAN structure, an additional layer of protection, simplifying network configuration while saving VLAN resources



- VLAN support and tagging

Supports the IEEE 802.1Q (4094 VLAN IDs)

### **Layer 3 services**

- Address Resolution Protocol (ARP)

Determines the MAC address of another IP host in the same subnet; supports static ARPs; gratuitous ARP allows detection of duplicate IP addresses; proxy ARP allows normal ARP operation between subnets or when subnets are separated by a Layer 2 network

- Dynamic Host Configuration Protocol (DHCP)

Simplifies the management of large IP networks; supports client; DHCP Relay enables DHCP operation across subnets

- Loopback interface address

Defines an address that can always be reachable, improving diagnostic capability

- User Datagram Protocol (UDP) helper function

Allows UDP broadcasts to be directed across router interfaces to specific IP unicast or subnet broadcast addresses and prevents server spoofing for UDP services such as DHCP

- Route maps

Provide more control during route redistribution; allow filtering and altering of route metrics

- DHCP server

Centralizes and reduces the cost of the IPv4 address management

### **Layer 3 routing**

- IPv4 routing protocols

Support static routes, RIP, OSPF, ISIS, and BGP

- IPv6 routing protocols

Provide routing of IPv6 at wire speed; support static routes, RIPng, OSPFv3, IS-ISv6, and BGP4+ for IPv6

- PIM-SSM, PIM-DM, and PIM-SM (for IPv4 and IPv6)

Support IP Multicast address management and inhibition of DoS attacks

- MPLS support

Provides extended support of MPLS, including MPLS VPNs and MPLS Traffic Engineering (MPLS TE)

- Virtual Private LAN Service (VPLS)

Establishes point-to-multipoint Layer 2 VPNs across a provider network

- Bidirectional Forwarding Detection (BFD)

Enables link connectivity monitoring and reduces network convergence time for RIP, OSPF, BGP, IS-IS, VRRP, MPLS, and IRF

- Policy-based routing

Makes routing decisions based on policies set by the network administrator

- Equal-Cost Multipath (ECMP)

Enables multiple equal-cost links in a routing environment to increase link redundancy and scale bandwidth



- IPv6 tunneling

Allows a smooth transition from IPv4 to IPv6 by encapsulating IPv6 traffic over an existing IPv4 infrastructure

**Security**

- Access control lists (ACLs)

Provide IP Layer 2 to Layer 4 traffic filtering; support global ACL, VLAN ACL, port ACL, and IPv6 ACL; up to 3K ingress ACLs and 1K egress ACLs are supported

- IEEE 802.1X

Defines an industry-standard method of user authentication using an IEEE 802.1X supplicant on the client in conjunction with a RADIUS server

- MAC-based authentication

Client is authenticated with the RADIUS server based on the client's MAC address

- Identity-driven security and access control

- Per-user ACLs

Permits or denies user access to specific network resources based on user identity and time of day, allowing multiple types of users on the same network to access specific network services without risking network security or providing unauthorized access to sensitive data

- Automatic VLAN assignment

Automatically assigns users to the appropriate VLAN based on their identities

- Port security

Allows access only to specified MAC addresses, which can be learned or specified by the administrator

- Secure FTP/SCP

Allows secure file transfer to and from the switch; protects against unwanted file downloads or unauthorized copying of a switch configuration file

- STP BPDU port protection

Blocks Bridge Protocol Data Units (BPDUs) on ports that do not require BPDUs, preventing forged BPDU attacks

- DHCP protection

Blocks DHCP packets from unauthorized DHCP servers, preventing denial-of-service attacks

- DHCP snooping

Helps ensure that DHCP clients receive IP addresses from authorized DHCP servers and maintain a list of DHCP entries for trusted ports; prevents reception of fake IP addresses and reduces ARP attacks, improving security

- DHCPv6 snooping

Ensures that DHCPv6 clients obtain IPv6 addresses from authorized DHCPv6 servers and record IP-to-MAC mappings of DHCPv6 clients

- Dynamic ARP

Protection blocks ARP broadcasts from unauthorized hosts, preventing eavesdropping or theft of network data

- STP root guard

Protects the root bridge from malicious attacks or configuration mistakes



- Guest VLAN  
Provides a browser-based environment to authenticated clients that is similar to IEEE 802.1X
- Port isolation  
Secures and adds privacy, and prevents malicious attackers from obtaining user information
- Endpoint Admission Defense (EAD)  
Provides security policies to users accessing a network
- RADIUS/HWTACACS  
Eases switch management security administration by using a password authentication server
- Secure management access  
Delivers secure encryption of all access methods (CLI, GUI, or MIB) through SSHv2, SSL, HTTPS, and/or SNMPv3
- Unicast Reverse Path Forwarding (URPF)  
Allows normal packets to be forwarded correctly, but discards the attaching packet due to lack of reverse path route or incorrect inbound interface; prevents source spoofing and distributed attacks; supports distributed URPF
- IP source guard  
Helps prevent IP spoofing attacks
- IPv6 source guard  
Helps prevent IPv6 spoofing attacks using ND Snooping as well as DHCPv6 Snooping
- ND Snooping  
Allows only packets with a legally obtained IPv6 address to pass

**Virtual Private Network (VPN)**

- Generic Routing Encapsulation (GRE)  
Transports Layer-2 connectivity over a Layer-3 path in a secured way; enables the segregation of traffic from site to site

**Convergence**

- LLDP-MED (Media Endpoint Discovery)  
Defines a standard extension of LLDP that stores values for parameters such as QoS and VLAN to automatically configure network devices such as IP phones
- Internet Group Management Protocol (IGMP)  
Utilizes Any-Source Multicast (ASM) or Source-Specific Multicast (SSM) to manage IPv4 multicast networks; supports IGMPv1, v2, and v3
- IEEE 802.1AB Link Layer Discovery Protocol (LLDP)  
Facilitates easy mapping using network management applications with LLDP automated device discovery protocol
- Multicast Source Discovery Protocol (MSDP)  
Allows multiple PIM-SM domains to interoperate; is used for inter-domain multicast applications
- Multicast VLAN  
Allows multiple VLANs to receive the same IPv4 or IPv6 multicast traffic, lessening network bandwidth demand by reducing or eliminating multiple streams to each VLAN





- LLDP-CDP compatibility

Receives and recognizes CDP packets from Cisco's IP phones for seamless interoperation

- IEEE 802.3af Power over Ethernet (PoE+)

Provides up to 30W per port that allows support of the latest PoE+-capable devices such as IP phones, wireless access points, and security cameras, as well as any IEEE 802.3af-compliant end device; eliminates the cost of additional electrical cabling and circuits that would otherwise be necessary in IP phone and WLAN deployments

- PoE allocations

Supports multiple methods (automatic, IEEE 802.3af-class, LLDP-MED, or user-specified) to allocate PoE power for more efficient energy savings

- Voice VLAN

Automatically assigns VLAN and priority for IP phones, simplifying network configuration and maintenance

- IP multicast snooping (data-driven IGMP)

Prevents flooding of IP multicast traffic

### **Additional information**

- Green initiative support

Provides support for RoHS and WEEE regulations

- Green IT and power

Improves energy efficiency through the use of the latest advances in silicon development; shuts off unused ports and utilizes variable-speed fans, reducing energy costs

- Unified HPE Comware operating system with modular architecture

Provides an easy-to-enhance-and-extend feature set, which doesn't require whole-scale changes; all switching, routing, and security platforms leverage the Comware OS, a common unified modular operating system

- Energy Efficient Ethernet (EEE) support

Reduces power consumption in accordance with IEEE 802.3az

### **Warranty and support**

- Limited Lifetime Warranty

See [hpe.com/networking/warrantysummary](http://hpe.com/networking/warrantysummary) for warranty and support information included with your product purchase.

- Software releases

To find software for your product, refer to [hpe.com/networking/support](http://hpe.com/networking/support); for details on the software releases available with your product purchase, refer to [hpe.com/networking/warrantysummary](http://hpe.com/networking/warrantysummary)



## HPE FLEXNETWORK 5510 HI SWITCH SERIES

### Specifications



**HPE 5510 24G 4SFP+ HI 1-slot switch (JH145A)**



**HPE 5510 48G 4SFP+ HI 1-slot switch (JH146A)**



**HPE 5510 24G PoE+ 4SFP+ HI 1-slot switch (JH147A)**

<b>I/O ports and slots</b>	24 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: Ports 1–24 support 10BASE-T/100BASE-TX, 1000BASE-T (full only); Ports 1–8 support MACsec 4 SFP+ 10GbE ports 1 port expansion module slot Supports a maximum of 6 SFP+ ports or 2 1/10GBASE-T ports or 2 40GbE ports, with optional module	48 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: Ports 1–48 support 10BASE-T/100BASE-TX, 1000BASE-T (full only); Ports 1–8 support MACsec 4 SFP+ 10GbE ports 1 port expansion module slot Supports a maximum of 6 SFP+ ports or 2 1/10GBASE-T ports or 2 40GbE ports, with optional module	24 RJ-45 autosensing 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+); Media Type: Auto-MDIX; Duplex: Ports 1–24 support 10BASE-T/100BASE-TX, 1000BASE-T (full only); Ports 1–8 support MACsec 4 SFP+ 10GbE ports 1 port expansion module slot Supports a maximum of 6 SFP+ ports or 2 1/10GBASE-T ports or 2 40GbE ports, with optional module
<b>Additional ports and slots</b>	1 dual-personality (RJ-45 or mini USB) serial console port 1 RJ-45 out-of-band management port 1 USB 2.0	1 dual-personality (RJ-45 or mini USB) serial console port 1 RJ-45 out-of-band management port 1 USB 2.0	1 dual-personality (RJ-45 or mini USB) serial console port 1 RJ-45 out-of-band management port 1 USB 2.0
<b>Power supplies</b>	2 power supply slots 1 minimum power supply required (ordered separately)	2 power supply slots 1 minimum power supply required (ordered separately)	2 power supply slots 1 minimum power supply required (ordered separately)
<b>Fan tray</b>	Airflow direction is Front (port side) to Back (power cord side)	Airflow direction is Front (port side) to Back (power cord side)	Airflow direction is Front (port side) to Back (power cord side)
<b>Physical characteristics</b>			
Dimensions	17.32(w) x 14.17(d) x 1.72(h) (44.00 x 36.00 x 4.37 cm) (1U height)	17.32(w) x 14.17(d) x 1.72(h) (44.0 x 36.0 x 4.37 cm) (1U height)	17.32(w) x 18.11(d) x 1.72(h) (43.99 x 46 x 4.37 cm) (1U height)
Weight	16.53 lb (7.5 kg) shipping weight	16.53 lb (7.5 kg)	27.56 lb (12.5 kg) shipping weight
<b>Memory and processor</b>	2 GB SDRAM; Packet buffer size: 4 MB, 512 MB flash	2 GB SDRAM; Packet buffer size: 4 MB, 512 MB flash	2 GB SDRAM; Packet buffer size: 4 MB, 512 MB flash
<b>Mounting and enclosure</b>	Mounts in an EIA standard 19-inch telco rack or equipment cabinet (hardware included)	Mounts in an EIA standard 19-inch telco rack or equipment cabinet (hardware included)	Mounts in an EIA standard 19-inch telco rack or equipment cabinet (hardware included)
<b>Performance</b>			
1000 Mb Latency	IPv6 Ready Certified < 5 µs	IPv6 Ready Certified < 5 µs	IPv6 Ready Certified < 5 µs
10 Gbps Latency	< 3 µs	< 3 µs	< 3 µs
Throughput	Up to 214 Mpps	Up to 250 Mpps	Up to 214 Mpps
Routing/Switching capacity	288 Gbps	336 Gbps	288 Gbps
Routing table size	32768 entries (IPv4), 16384 entries (IPv6)	32768 entries (IPv4), 16384 entries (IPv6)	32768 entries (IPv4), 16384 entries (IPv6)
MAC address table size	32768 entries	32768 entries	32768 entries



## HPE FLEXNETWORK 5510 HI SWITCH SERIES

### Specifications (continued)

	HPE 5510 24G 4SFP+ HI 1-slot switch (JH145A)	HPE 5510 48G 4SFP+ HI 1-slot switch (JH146A)	HPE 5510 24G PoE+ 4SFP+ HI 1-slot switch (JH147A)
<b>Environment</b>			
Operating temperature	32°F to 113°F (0°C to 45°C)	32°F to 113°F (0°C to 45°C)	32°F to 113°F (0°C to 45°C)
Operating relative humidity	10% to 90%, noncondensing	10% to 90%, noncondensing	10% to 90%, noncondensing
Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)	-40°F to 158°F (-40°C to 70°C)	-40°F to 158°F (-40°C to 70°C)
Nonoperating/Storage relative humidity	5% to 95%, noncondensing	5% to 95%, noncondensing	5% to 95%, noncondensing
Acoustic	Low-speed fan: 52.8 dB, High-speed fan: 66.7 dB; ISO 7779	Low-speed fan: 49.9 dB, High-speed fan: 64.8 dB; ISO 7779	Low-speed fan: 57.6 dB, High-speed fan: 66.9 dB; ISO 7779
<b>Electrical characteristics</b>			
Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Maximum heat dissipation	365 BTU/hr (385.08 kJ/hr), Ranges from 167 BTU/hr to 392 BTU/hr, depending on power supply configuration	238 BTU/hr (686.81 kJ/hr), Ranges from 201 BTU/hr to 443 BTU/hr, depending on power supply configuration	2217 BTU/hr (3599.66 kJ/hr), Ranges from 228 BTU/hr to 3412 BTU/hr, depending on power supply configuration
Voltage	100–240 VAC, rated (90–264 VAC, max) -48 to -60 VDC, rated (-36 to -72 VDC, max) (depending on power supply chosen)	100–240 VAC, rated (90–264 VAC, max) -48 to -60 VDC, rated (-36 to -72 VDC, max) (depending on power supply chosen)	100–240 VAC, rated (90–264 VAC, max) (depending on power supply chosen)
Maximum power rating	107W	150W	650W
Idle power	55W	70W	67W
PoE power			740W PoE+
<b>Notes</b>	Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.	Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.	Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. PoE+ power range is from PoE+ power is the power supplied by the internal power supplies. It is dependent on the type and quantity of power supplies. Device supports 1 or 2 internal modular power supplies.
<b>Safety</b>			
	UL 60950-1; EN 60825-1 Safety of Laser Products-Part 1; EN 60825-2 Safety of Laser Products-Part 2; IEC 60950-1; EN 60950-1; CAN/CSA-C22.2 No. 60950-1; FDA 21 CFR Subchapter J; ROHS Compliance; AS/NZS 60950-1; GB 4943; EAC (EurAsian Conformity Certification)	UL 60950-1; EN 60825-1 Safety of Laser Products-Part 1; EN 60825-2 Safety of Laser Products-Part 2; IEC 60950-1; EN 60950-1; CAN/CSA-C22.2 No. 60950-1; FDA 21 CFR Subchapter J; ROHS Compliance; AS/NZS 60950-1; GB 4943; EAC (EurAsian Conformity Certification)	UL 60950-1; EN 60825-1 Safety of Laser Products-Part 1; EN 60825-2 Safety of Laser Products-Part 2; IEC 60950-1; EN 60950-1; CAN/CSA-C22.2 No. 60950-1; FDA 21 CFR Subchapter J; ROHS Compliance; AS/NZS 60950-1; GB 4943; EAC (EurAsian Conformity Certification)
<b>Emissions</b>			
	EMC Directive 2004/108/EC; FCC (CFR 47, Part 15) Class A; EN 61000-4-11:2004; ANSI C63.4-2009; EN 61000-3-3:2008; VCCI V-3/2012.04; EN 61000-3-2:2006+A1:2009+A2:2009; EN 61000-4-3:2006; EN 61000-4-4:2012; EN 61000-4-5:2006; EN 61000-4-6:2009; CISPR 22:2008 Class A; EN 55022:2010 Class A; EN 61000-4-29:2000; CISPR 24:2010; EN 300 386 V1.6.1; VCCI V-3/2013.04 Class A	EMC Directive 2004/108/EC; FCC (CFR 47, Part 15) Class A; EN 61000-4-11:2004; ANSI C63.4-2009; EN 61000-3-3:2008; VCCI V-3/2012.04; EN 61000-3-2:2006+A1:2009+A2:2009; EN 61000-4-3:2006; EN 61000-4-4:2012; EN 61000-4-5:2006; EN 61000-4-6:2009; CISPR 22:2008 Class A; EN 55022:2010 Class A; EN 61000-4-29:2000; CISPR 24:2010; EN 300 386 V1.6.1; VCCI V-3/2013.04 Class A	EMC Directive 2004/108/EC; FCC (CFR 47, Part 15) Class A; EN 61000-4-11:2004; ANSI C63.4-2009; EN 61000-3-3:2008; VCCI V-3/2012.04; EN 61000-3-2:2006+A1:2009+A2:2009; EN 61000-4-3:2006; EN 61000-4-4:2012; EN 61000-4-5:2006; EN 61000-4-6:2009; CISPR 22:2008 Class A; EN 55022:2010 Class A; EN 61000-4-29:2000; CISPR 24:2010; EN 300 386 V1.6.1; VCCI V-3/2013.04 Class A
<b>Immunity</b>			
Generic	EN 55024	EN 55024	EN 55024
ESD	EN 300 386	EN 300 386	EN 300 386



HPE FLEXNETWORK 5510 HI SWITCH SERIES

Specifications (continued)

	HPE 5510 24G 4SFP+ HI 1-slot switch (JH145A)	HPE 5510 48G 4SFP+ HI 1-slot switch (JH146A)	HPE 5510 24G PoE+ 4SFP+ HI 1-slot switch (JH147A)
Management	IMC—Intelligent Management Center; Command-line interface; SNMP manager	IMC—Intelligent Management Center; Command-line interface; SNMP manager	IMC—Intelligent Management Center; Command-line interface; SNMP manager
Services	Refer to the HPE website at <a href="http://hpe.com/networking/services">hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HPE sales office.	Refer to the HPE website at <a href="http://hpe.com/networking/services">hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HPE sales office.	Refer to the HPE website at <a href="http://hpe.com/networking/services">hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HPE sales office.



## HPE FLEXNETWORK 5510 HI SWITCH SERIES

### Specifications (continued)



**HPE 5510 48G PoE+ 4SFP+ HI 1-slot Switch (JH148A)**



**HPE 5510 24G SFP 4SFP+ HI 1-slot Switch (JH149A)**

<b>I/O ports and slots</b>	48 RJ-45 autosensing 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+); Duplex: Ports 1–48 support 10BASE-T/100BASE-TX, 1000BASE-T (full only); Ports 1–8 support MACsec 4 SFP+ 10GbE ports 1 port expansion module slot Supports a maximum of 6 SFP+ ports or 2 1/10GBASE-T ports or 2 40GbE ports, with optional module	16 fixed Gigabit Ethernet SFP ports; Ports 1–8 support MACsec 8 Combo GbE (SFP and RJ-45) dual-personality 1000 Mbps port, IEEE 802.3ab Type 1000BASE-T); Duplex: Ports 1–24 support 10BASE-T/100BASE-TX, 1000BASE-T (full only) 4 SFP+ 10GbE ports 1 port expansion module slot Supports a maximum of 6 SFP+ ports or 2 1/10GBASE-T ports or 2 40GbE ports, with optional module
<b>Additional ports and slots</b>	1 dual-personality (RJ-45 or mini USB) serial console port 1 RJ-45 out-of-band management port 1 USB 2.0	1 dual-personality (RJ-45 or mini USB) serial console port 1 RJ-45 out-of-band management port 1 USB 2.0
<b>Power supplies</b>	2 power supply slots 1 minimum power supply required (ordered separately)	2 power supply slots 1 minimum power supply required (ordered separately)
<b>Fan tray</b>	Airflow direction is Front (port side) to Back (power cord side)	Airflow direction is Front (port side) to Back (power cord side)
<b>Physical characteristics</b>		
Dimensions	17.32(w) x 18.11(d) x 1.72(h) (43.99 x 46 x 4.37 cm) (1U height)	17.32(w) x 14.17(d) x 1.72(h) (43.99 x 35.99 x 4.37 cm) (1U height)
Weight	27.56 lb (12.5 kg) shipping weight	16.53 lb (7.5 kg) shipping weight
<b>Memory and processor</b>	2 GB SDRAM; Packet buffer size: 4 MB, 512 MB flash	2 GB SDRAM; Packet buffer size: 4 MB, 512 MB flash
<b>Mounting and enclosure</b>	Mounts in an EIA standard 19-inch telco rack or equipment cabinet (hardware included)	Mounts in an EIA standard 19-inch telco rack or equipment cabinet (hardware included)
<b>Performance</b>		
1000 Mb Latency	IPv6 Ready Certified < 5 µs	IPv6 Ready Certified < 5 µs
10 Gbps Latency	< 3 µs	< 3 µs
Throughput	Up to 250 Mpps	Up to 214 Mpps
Routing/Switching capacity	336 Gbps	288 Gbps
Routing table size	32768 entries (IPv4), 16384 entries (IPv6)	32768 entries (IPv4), 16384 entries (IPv6)
MAC address table size	32768 entries	32768 entries
<b>Environment</b>		
Operating temperature	32°F to 113°F (0°C to 45°C)	32°F to 113°F (0°C to 45°C)
Operating relative humidity	10% to 90%, noncondensing	10% to 90%, noncondensing
Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)	-40°F to 158°F (-40°C to 70°C)
Nonoperating/Storage relative humidity	5% to 95%, noncondensing	5% to 95%, noncondensing
Acoustic	Low-speed fan: 57.6 dB, High-speed fan: 66.9 dB; ISO 7779	Low-speed fan: 50.5 dB, High-speed fan: 66.9 dB; ISO 7779



## HPE FLEXNETWORK 5510 HI SWITCH SERIES

### Specifications (continued)

	HPE 5510 48G PoE+ 4SFP+ HI 1-slot Switch (JH148A)	HPE 5510 24G SFP 4SFP+ HI 1-slot Switch (JH149A)
<b>Electrical characteristics</b>		
Frequency	50/60 Hz	50/60 Hz
Maximum heat dissipation	2286 BTU/hr (2411.73 kJ/hr), Heat dissipation ranges from 256 BTU/hr to 6142 BTU/hr, depending on power supply configuration	409 BTU/hr (431.49 kJ/hr), Heat dissipation ranges from 163 BTU/hr to 498 BTU/hr, depending on power supply configuration
Voltage	100–240 VAC, rated (90–264 VAC, max) (depending on power supply chosen)	100–240 VAC, rated (90–264 VAC, max) -48 to -60 VDC, rated (-36 to -72 VDC, max) (depending on power supply chosen)
Maximum power rating	670W	120W
Idle power	75W	48W
PoE power	1440W PoE+	
Notes	Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. PoE+ power range is from to PoE+ power is the power supplied by the internal power supplies. It is dependent on the type and quantity of power supplies. Device supports 1 or 2 internal modular power supplies.	Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.
<b>Safety</b>		
	UL 60950-1; EN 60825-1 Safety of Laser Products-Part 1; EN 60825-2 Safety of Laser Products-Part 2; IEC 60950-1; EN 60950-1; CAN/CSA-C22.2 No. 60950-1; FDA 21 CFR Subchapter J; ROHS Compliance; AS/NZS 60950-1; GB 4943; EAC (EurAsian Conformity Certification)	UL 60950-1; EN 60825-1 Safety of Laser Products-Part 1; EN 60825-2 Safety of Laser Products-Part 2; IEC 60950-1; EN 60950-1; CAN/CSA-C22.2 No. 60950-1; FDA 21 CFR Subchapter J; ROHS Compliance; AS/NZS 60950-1; GB 4943; EAC (EurAsian Conformity Certification)
<b>Emissions</b>		
	EMC Directive 2004/108/EC; FCC (CFR 47, Part 15) Class A; EN 61000-4-11:2004; ANSI C63.4-2009; EN 61000-3-3:2008; VCCI V-3/2012.04; EN 61000-3-2:2006+A1:2009+A2:2009; EN 61000-4-3:2006; EN 61000-4-4:2012; EN 61000-4-5:2006; EN 61000-4-6:2009; CISPR 22:2008 Class A; EN 55022:2010 Class A; EN 61000-4-29: 2000; CISPR 24:2010; EN 300 386 V1.6.1; VCCI V-3/2013.04 Class A	EMC Directive 2004/108/EC; FCC (CFR 47, Part 15) Class A; EN 61000-4-11:2004; ANSI C63.4-2009; EN 61000-3-3:2008; VCCI V-3/2012.04; EN 61000-3-2:2006+A1:2009+A2:2009; EN 61000-4-3:2006; EN 61000-4-4:2012; EN 61000-4-5:2006; EN 61000-4-6:2009; CISPR 22:2008 Class A; EN 55022:2010 Class A; EN 61000-4-29: 2000; CISPR 24:2010; EN 300 386 V1.6.1; VCCI V-3/2013.04 Class A
<b>Immunity</b>		
Generic	EN 55024	EN 55024
ESD	EN 300 386	EN 300 386
<b>Management</b>		
	IMC—Intelligent Management Center; Command-line interface; SNMP manager	IMC—Intelligent Management Center; Command-line interface; SNMP manager
<b>Services</b>		
	Refer to the HPE website at <a href="http://hpe.com/networking/services">hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HPE sales office.	Refer to the HPE website at <a href="http://hpe.com/networking/services">hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HPE sales office.



Standards and Protocols  
(applies to all products in series)

BGP	RFC 1657 Definitions of Managed Objects for BGPv4	RFC 1771 BGPv4	RFC 2385 BGP Session Protection via TCP MD5 RFC 2858 BGP-4 Multi-Protocol Extensions
Device management	RFC 1155 Structure and Mgmt. Information (SMIv1) RFC 1157 SNMPv1/v2c RFC 1305 NTPv3 RFC 2573 (SNMPv3 Applications) RFC 2578-2580 SMIv2	RFC 2819 (RMON groups Alarm, Event, History and Statistics only) RFC 3416 (SNMP Protocol Operations v2) RFC 3417 (SNMP Transport Mappings) HTML and telnet management	Multiple Configuration Files SNMP v3 and RMON RFC support SSHv1/SSHv2 Secure Shell TACACS/ TACACS+



**Standards and Protocols (continued)**

(applies to all products in series)

<b>General protocols</b>	IEEE 802.1ad Q-in-Q	RFC 1350 TFTP Protocol (revision 2)	RFC 3484 Default Address Selection for Internet Protocol version 6 (IPv6)
	IEEE 802.1ak Multiple Registration Protocol (MRP) and Multiple VLAN Registration Protocol (MVRP)	RFC 1519 CIDR	RFC 3493 Basic Socket Interface Extensions for IPv6
	IEEE 802.1AE MACsec	RFC 1542 BOOTP Extensions	RFC 3542 Advanced Sockets Application Program Interface (API) for IPv6
	IEEE 802.1AX—2008 Link Aggregation	RFC 1591 DNS (client only)	RFC 3576 Ext to RADIUS (CoA only)
	IEEE 802.1D MAC Bridges	RFC 1643 Definitions of Managed Objects for the Ethernet-like Interface Types	RFC 3580 IEEE 802.1X Remote Authentication Dial In User Service (RADIUS) Usage Guidelines
	IEEE 802.1p Priority	RFC 1723 RIP v2	RFC 3587 IPv6 Global Unicast Address Format
	IEEE 802.1Q VLANs	RFC 1812 IPv4 Routing	RFC 3596 DNS Extensions to Support IP Version 6
	IEEE 802.1s Multiple Spanning Trees	RFC 1866 Hypertext Markup Language—2.0	RFC 3623 Graceful OSPF Restart
	IEEE 802.1v VLAN classification by Protocol and Port	RFC 1887 An Architecture for IPv6 Unicast Address Allocation	RFC 3704 Unicast Reverse Path Forwarding (URPF)
	IEEE 802.1w Rapid Reconfiguration of Spanning Tree	RFC 1901 Introduction to Community-based SNMPv2	RFC 3768 Virtual Router Redundancy Protocol (VRRP)
	IEEE 802.1X PAE	RFC 1902-1907 SNMPv2	RFC 3810 Multicast Listener Discovery Version 2 (MLDv2) for IPv6
	IEEE 802.3 Type 10BASE-T	RFC 2131 DHCP	RFC 4090 Fast Reroute Extensions to RSVP-TE for LSP Tunnels
	IEEE 802.3ab 1000BASE-T	RFC 2236 IGMP Snooping	RFC 4113 Management Information Base for the User Datagram Protocol (UDP)
	IEEE 802.3ac (VLAN Tagging Extension)	RFC 2338 VRRP	RFC 4213 Basic IPv6 Transition Mechanisms
	IEEE 802.3ad Link Aggregation (LAG)	RFC 2375 IPv6 Multicast Address Assignments	RFC 4250 The Secure Shell (SSH) Protocol Assigned Numbers
	IEEE 802.3ad Link Aggregation Control Protocol (LACP)	RFC 2462 IPv6 Stateless Address Autoconfiguration	RFC 4251 The Secure Shell (SSH) Protocol Architecture
	IEEE 802.3ae 10-Gigabit Ethernet	RFC 2474 Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers	RFC 4252 The Secure Shell (SSH) Authentication Protocol
	IEEE 802.3af Power over Ethernet	RFC 2475 Architecture for Differentiated Services	RFC 4253 The Secure Shell (SSH) Transport Layer Protocol
	IEEE 802.3at Power over Ethernet Plus	RFC 2597 Assured Forwarding PHB Group	RFC 4254 The Secure Shell (SSH) Connection Protocol
	IEEE 802.3az Energy Efficient Ethernet	RFC 2616 Hypertext Transfer Protocol—HTTP/1.1	RFC 4291 IP Version 6 Addressing Architecture
	IEEE 802.3i 10BASE-T	RFC 2644 Directed Broadcast Control	RFC 4443 Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification
	IEEE 802.3u 100BASE-X	RFC 2665 Definitions of Managed Objects for the Ethernet-like Interface Types	RFC 4541 Considerations for Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) Snooping Switches
	IEEE 802.3x Flow Control	RFC 2668 Definitions of Managed Objects for IEEE 802.3 Medium Attachment Units (MAUs)	RFC 4575 A Session Initiation Protocol (SIP) Event Package for Conference State
	IEEE 802.3z 1000BASE-X	RFC 2711 IPv6 Router Alert Option	RFC 4594 Configuration Guidelines for DiffServ Service Classes
	RFC 768 UDP	RFC 2784 Generic Routing Encapsulation (GRE)	RFC 4675 RADIUS VLAN & Priority
	RFC 783 TFTP Protocol (revision 2)	RFC 2865 Remote Authentication Dial In User Service (RADIUS)	RFC 4750 OSPF Version 2 Management Information Base
	RFC 791 IP	RFC 2866 RADIUS Accounting	RFC 4762 Virtual Private LAN Service (VPLS) Using Label Distribution Protocol (LDP) Signaling
	RFC 792 ICMP	RFC 2868 RADIUS Attributes for Tunnel Protocol Support	RFC 5095 Deprecation of Type 0 Routing Headers in IPv6
	RFC 793 TCP	RFC 3046 DHCP Relay Agent Information Option	802.1r—GARP Proprietary Attribute Registration Protocol (GPRP)
	RFC 826 ARP	RFC 3209 RSVP-TE Extensions to RSVP for LSP Tunnels	
	RFC 854 TELNET	RFC 3246 Expedited Forwarding PHB	
	RFC 855 Telnet Option Specification	RFC 3410 Applicability Statements for SNMP	
	RFC 894 IP over Ethernet	RFC 3414 User-based Security Model (USM) for version 3 of the Simple Network Management Protocol (SNMPv3)	
	RFC 925 Multi-LAN Address Resolution	RFC 3415 View-based Access Control Model (VACM) for the Simple Network Management Protocol (SNMP)	
	RFC 950 Internet Standard Subnetting Procedure	RFC 3416 Protocol Operations for SNMP	
	RFC 951 BOOTP	RFC 3417 Transport Mappings for the Simple Network Management Protocol (SNMP)	
	RFC 959 File Transfer Protocol (FTP)	RFC 3418 Management Information Base (MIB) for the Simple Network Management	
	RFC 1027 Proxy ARP		
	RFC 1042 IP Datagrams		
	RFC 1058 RIPv1		
	RFC 1071 Computing the Internet Checksum		
	RFC 1166 IP Addresses		
	RFC 1122 Requirements for Internet Hosts—Communication Layers		
	RFC 1123 Requirements for Internet Hosts		
	RFC 1141 Incremental updating of the Internet checksum		
	RFC 1191 Path MTU discovery		
	RFC 1213 Management Information Base for Network Management of TCP/IP-based internets		
	RFC 1256 ICMP Router Discovery Protocol (IRDP)		
	RFC 1305 NTPv3		





**Standards and Protocols (continued)**

(applies to all products in series)

<b>IP multicast</b>	RFC 1112 IGMPv1 RFC 2236 IGMPv2 RFC 2710 Multicast Listener Discovery (MLD) for IPv6	RFC 2858 Multiprotocol Extensions for BGP-4 RFC 3376 IGMPv3 RFC 3569 An Overview of Source-Specific Multicast (SSM)	RFC 3618 Multicast Source Discovery Protocol (MSDP) RFC 3973 PIM Dense Mode RFC 4601 PIM Sparse Mode
<b>IPv6</b>	RFC 1981 IPv6 Path MTU Discovery RFC 2460 IPv6 Specification RFC 2461 IPv6 Neighbor Discovery RFC 2463 ICMPv6 RFC 2464 Transmission of IPv6 over Ethernet Networks RFC 2545 Use of BGP-4 Multiprotocol Extensions for IPv6 Inter-Domain Routing	RFC 3162 RADIUS and IPv6 RFC 3306 Unicast-Prefix-based IPv6 Multicast Addresses RFC 3307 IPv6 Multicast Address Allocation RFC 3315 DHCPv6 (client and relay) RFC 3484 Default Address Selection for IPv6 RFC 3736 Stateless Dynamic Host Configuration Protocol (DHCP) Service for IPv6	RFC 4291 IP Version 6 Addressing Architecture RFC 4293 MIB for IP RFC 4443 ICMPv6 RFC 4861 IPv6 Neighbor Discovery RFC 4862 IPv6 Stateless Address Auto-configuration RFC 6724 Default Address Selection for Internet Protocol Version 6 (IPv6)
<b>MIBs</b>	RFC 1212 Concise MIB Definitions RFC 1213 MIB II RFC 1215 A Convention for Defining Traps for use with the SNMP RFC 1493 Bridge MIB RFC 1757 Remote Network Monitoring MIB RFC 2096 IP Forwarding Table MIB RFC 2233 Interface MIB RFC 2571 SNMP Framework MIB RFC 2572 SNMP-MPD MIB RFC 2573 SNMP-Notification MIB	RFC 2573 SNMP-Target MIB RFC 2574 SNMP USM MIB RFC 2618 RADIUS Authentication Client MIB RFC 2620 RADIUS Accounting Client MIB RFC 2665 Ethernet-Like-MIB RFC 2668 802.3 MAU MIB RFC 2674 Definitions of Managed Objects for Bridges with Traffic Classes, Multicast Filtering, and Virtual Extensions	RFC 2737 Entity MIB (Version 2) RFC 2819 RMON MIB RFC 2863 The Interfaces Group MIB RFC 2925 Ping MIB RFC 3414 SNMP-User based-SM MIB RFC 3415 SNMP-View based-ACM MIB RFC 3418 MIB for SNMPv3 RFC 3621 Power Ethernet MIB
<b>MPLS</b>	RFC 2961 RSVP Refresh Overhead Reduction Extensions RFC 3031 Multiprotocol Label Switching Architecture	RFC 3032 MPLS Label Stack Encoding RFC 3036 LDP Specification	RFC 4762 Virtual Private LAN Service (VPLS) Using Label Distribution Protocol (LDP) Signaling
<b>Network management</b>	IEEE 802.1AB Link Layer Discovery Protocol (LLDP) RFC 1215 Convention for Defining Traps for use with the SNMP RFC 2579 Textual Conventions for SMIv2 RFC 2580 Conformance Statements for SMIv2	RFC 2818 HTTP over TLS RFC 2819 Four groups of RMON: 1 (statistics), 2 (history), 3 (alarm) and 9 (events) RFC 6398 IP Router Alert Considerations and Usage	ANSI/TIA-1057 LLDP Media Endpoint Discovery (LLDP-MED) SNMPv1/v2c/v3
<b>OSPF</b>	RFC 1587 OSPF NSSA	RFC 1850 OSPFv2 Management Information Base (MIB), traps	RFC 2328 OSPFv2 RFC 2370 OSPF Opaque LSA Option
<b>QoS/CoS</b>	RFC 2474 DS Field in the IPv4 and IPv6 Headers	RFC 3260 New Terminology and Clarifications for DiffServ	
<b>Security</b>	IEEE 802.1X Port Based Network Access Control RFC 1492 TACACS+ RFC 2138 RADIUS Authentication	RFC 2139 RADIUS Accounting RFC 2865 RADIUS Authentication RFC 2866 RADIUS Accounting RFC 3260 New Terminology and Clarifications for DiffServ RFC 4716 SSH Public Key File Format	Secure Sockets Layer (SSL) SSHv2 Secure Shell



HPE FLEXNETWORK 5510 HI SWITCH SERIES ACCESSORIES

Modules	<b>NEW</b> HPE 5510 QSFP+ 2-port Module (JH155A) <b>NEW</b> HPE 5130/5510 10GBASE-T 2-port Module (JH156A) <sup>1</sup> <b>NEW</b> HPE 5130/5510 10GbE SFP+ 2-port Module (JH157A) <sup>1</sup>
Transceivers	HPE X115 100M SFP LC BX 10-U Transceiver (JD100A) <sup>2</sup> HPE X115 100M SFP LC BX 10-D Transceiver (JD101A) <sup>2</sup> HPE X110 100M SFP LC FX Transceiver (JD102B) <sup>2</sup> HPE X110 100M SFP LC LX Transceiver (JD120B) <sup>2</sup> HPE X125 1G SFP LC LH40 1310nm Transceiver (JD061A) <sup>3</sup> HPE X120 1G SFP LC LH40 1550nm Transceiver (JD062A) <sup>3</sup> HPE X125 1G SFP LC LH70 Transceiver (JD063B) <sup>3</sup> HPE X120 1G SFP RJ45 1000BASE-T Transceiver (JD089B) <sup>3</sup> HPE X120 1G SFP LC BX 10-U Transceiver (JD098B) <sup>3</sup> HPE X120 1G SFP LC BX 10-D Transceiver (JD099B) <sup>3</sup> HPE X120 1G SFP LC LH100 Transceiver (JD103A) <sup>3</sup> HPE X120 1G SFP LC SX Transceiver (JD118B) <sup>3</sup> HPE X120 1G SFP LC LX Transceiver (JD119B) <sup>3</sup> HPE X130 10G SFP+ LC SR Transceiver (JD092B) HPE X130 10G SFP+ LC LR Transceiver (JD094B) HPE X2A0 10G SFP+ 7m AOC Cable (JL290A) <sup>4</sup> HPE X2A0 10G SFP+ 10m AOC Cable (JL291A) <sup>4</sup> HPE X2A0 10G SFP+ 20m AOC Cable (JL292A) <sup>4</sup>

<sup>1</sup> Module supports MACsec

<sup>2</sup> Supported only on JH149A (HPE 5510 24G SFP 4SFP+ HI 1-Slot Switch) and only in 1G downlink configuration

<sup>3</sup> Transceiver cannot be used on optional module JH157A (HPE 5130/5510 10GbE SFP+ 2-port Module)

<sup>4</sup> Requires R1122P02 code version or later



HPE FLEXNETWORK 5510 HI SWITCH SERIES ACCESSORIES (CONTINUED)

Transceivers

- HPE X240 10G SFP+ SFP+ 0.65m DAC Campus-Cable (JH693A)
- HPE X240 10G SFP+ SFP+ 1.2m DAC Campus-Cable (JH694A)
- HPE X240 10G SFP+ SFP+ 3m DAC Campus-Cable (JH695A)
- HPE X240 10G SFP+ to SFP+ 5m Direct Attach Copper Cable (JG081C)
- HPE X130 10G SFP+ LC ER 40km Transceiver (JG234A)<sup>5</sup>
- HPE X130 10G SFP+ LC LH 80km Transceiver (JG915A)<sup>5</sup>
- HPE X130 10G SFP+ LC LRM Transceiver (JD093B)<sup>5</sup>
- HPE X130 10G SFP+ LC LH80 Tunable Transceiver (JL250A)
- HPE X140 40G QSFP+ LC BiDi 100m MM Campus-Transceiver (JH678A)
- HPE X140 40G QSFP+ MPO SR4 Campus-Transceiver (JH679A)
- HPE X240 40G QSFP+ QSFP+ 1m DAC Campus-Cable (JH697A)
- HPE X240 40G QSFP+ QSFP+ 3m DAC Campus-Cable (JH698A)
- HPE X240 40G QSFP+ QSFP+ 5m DAC Campus-Cable (JH699A)
- HPE X240 40G QSFP+ to 4x10G SFP+ 1m Direct Attach Copper Splitter Cable (JG329A)
- HPE X240 QSFP+ 4x10G SFP+ 3m DAC Campus-Cable (JH700A)
- HPE X240 40G QSFP+ to 4x10G SFP+ 5m Direct Attach Copper Splitter Cable (JG331A)
- HPE X140 40G QSFP+ LC LR4 SM 10km 1310nm Campus-Transceiver (JH677A)
- HPE X140 40G QSFP+ MPO MM 850nm CSR4 300m Campus-Transceiver (JH681A)

Cables

- Aruba X2C2 RJ45 to DB9 Console Cable (JL448A)
- HPE 0.5 m Multimode OM3 LC/LC Optical Cable (AJ833A)
- HPE 1 m Multimode OM3 LC/LC Optical Cable (AJ834A)
- HPE 2 m Multimode OM3 LC/LC Optical Cable (AJ835A)
- HPE 5 m Multimode OM3 LC/LC Optical Cable (AJ836A)
- HPE 15 m Multimode OM3 LC/LC Optical Cable (AJ837A)
- HPE 30 m Multimode OM3 LC/LC Optical Cable (AJ838A)
- HPE 50 m Multimode OM3 LC/LC Optical Cable (AJ839A)
- HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 1m Cable (QK732A)
- HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 2m Cable (QK733A)
- HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 5m Cable (QK734A)
- HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 15m Cable (QK735A)
- HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 30m Cable (QK736A)
- HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 50m Cable (QK737A)

HPE 5510 24G 4SFP+ HI 1-slot Switch (JH145A)

- HPE X361 150W 100-240VAC to 12VDC Power Supply (JD362B)<sup>6</sup>
- HPE X361 150W 48-60VDC to 12VDC Power Supply (JD366B)<sup>6</sup>

HPE 5510 48G 4SFP+ HI 1-slot Switch (JH146A)

- HPE X361 150W 100-240VAC to 12VDC Power Supply (JD362B)<sup>6</sup>
- HPE X361 150W 48-60VDC to 12VDC Power Supply (JD366B)<sup>6</sup>

HPE 5510 24G PoE+ 4SFP+ HI 1-slot Switch (JH147A)

- HPE X362 720W 100-240VAC to 56VDC PoE Power Supply (JG544A)<sup>6</sup>
- HPE X362 1110W 115-240VAC to 56VDC PoE Power Supply (JG545A)<sup>6</sup>

HPE 5510 48G PoE+ 4SFP+ HI 1-slot Switch (JH148A)

- HPE X362 720W 100-240VAC to 56VDC PoE Power Supply (JG544A)<sup>6</sup>
- HPE X362 1110W 115-240VAC to 56VDC PoE Power Supply (JG545A)<sup>6</sup>

HPE 5510 24G SFP 4SFP+ HI 1-slot Switch (JH149A)

- HPE X361 150W 100-240VAC to 12VDC Power Supply (JD362B)<sup>6</sup>
- HPE X361 150W 48-60VDC to 12VDC Power Supply (JD366B)<sup>6</sup>

<sup>5</sup> Supported only on optional module JH157A  
<sup>6</sup> Products covered by 1 year warranty. See details at [hpe.com/networking/warrantyquickref](https://hpe.com/networking/warrantyquickref)

LEARN MORE AT  
[hpe.com/networking](https://hpe.com/networking)



Make the right purchase decision.  
Contact our presales specialists.



Chat



Email



Call



Get updates



**Hewlett Packard  
Enterprise**