POWERBAR - PXB5PVNNB-UL12

B-PDU [12] Universal outlet, Master Air Circuit Breaker 16A & Indicator, NEMA 5-15P Plug, Cable 3m with 1.31 sq.mm.

Electrical	
Input connector	1 x NEMA 5-15P Plug
Output connectors	12 x Universal Outlet 15A
Nominal input voltage	200~250 VAC
No. of phases	1
Acceptable input voltage	± 10% of normal voltage
Input frequency	50/60 Hz
Max. Power	3,750 W
Length of connection cable	3m
No. of internal wires	3 (single-phase PDU)
Cable cross-section	1.31 mm^2 (16AWG)

Physical	
Power Input	Left end single input
Bracket Installation	2 ways interchangeable L mounting brackets
Rack Installation	Vertical mounting
Control Function	Master Air Circuit Breaker 16A (Legrand) with plastic cover & Indicator
Protection Function	Master Air Circuit Breaker 16A (Legrand)
Case Material	Aluminum Alloy (Black)
Outlets Material	PC-ABS (Black)
Insulation	Molded PVC insulation between sockets and case
Circuit Wiring Material	Industrial grade copper bar welded
Product Size (L × W × D)	838.6 x 44.4 x 93.2 mm
Shipping dimensions (L × W × D)	930 x 90 x 120 mm
Weight	1.5 kg

Environmental	
Maximum elevation (above MSL) Operating	15,000 ft (4,500 m)
Maximum elevation (above MSL) Storage	50,000 ft (15,000 m)
Temperature Operating	–5 to 50° C (23 to 122° F)
Temperature Storage	–25 to 80° C (–13 to 176° F)
Humidity Operating	5 – 95% RH non-condensing
Humidity Storage	5 – 95% RH non-condensing

Compliance	
Safety verification	CE, LVD, EMC, FCC, EN 55032 : 2015, EN 55035 : 2017, EN 61000-2-11 : 2000
	EN 61000-3-12 : 2011
Environment verification	RoHS
Factory verification	ISO9001, ISO14001, ISO45001

POWERBAR - PXB5PVNNB-UL12
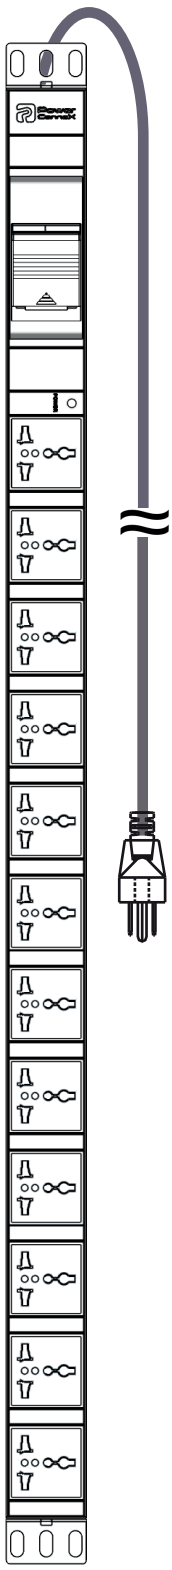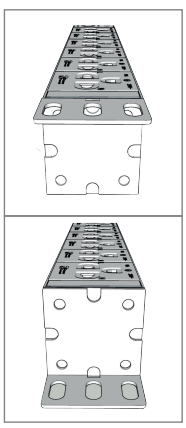
PDU Drawing