

AE-DC4928-N6PRO



- 2K front and 1080P rear dual high definition digital lens.
- 2K video from the front camera and 1080P video from the rear camera.
- Full touch screen, IPS screen viewing angle can reach to 178°.
- Support built-in MIC and speaker for audio in and out.
- GPS module is optional to support speed display and route tracking playback.
- Supports TF card with the storage up to 128 GB. Seamless storage without missing seconds.
- Built-in G-sensor. When the vehicle collides or vibrates severely, the emergency recording will be triggered, and the emergency recording backup will be locked.
- The viewing angle can be adjusted up and down by 15°.
- Supports voice recognition. “Open the screen”, “Close the screen”, “Show the way forward”, “Show the way backward”, “Display all”, “Take the photo”, “Start to record”, “Finish recording” and “Lock the video” can be recognized.
- Convenient installation, simple operation, recording after plugging, and automatic recording after power on.
- Reversing parking assist.
- Parking Monitoring . (Optional Fuse Box)

▪ Specification


Model		AE-DC4928-N6PRO	
Camera	Image Sensor	GC4653 (Front) / GC2053 (Rear)	
	Angle Adjustment	adjusted up and down by 15°	
	Power-off Memory	YES	
Lens	Lens Type	G+P	
	Aperture	F1.6(Front) / F2.0(Rear)	
Wi-Fi	Frequency Range	2412-2472MHZ	
	Channel Bandwidth	2412-2472MHZ	
Image	Wide Dynamic Range (WDR)	NO	
	Image Enhancement	YES	
	HDR	NO	
Interface	Built-in Microphone	YES	
	Built-in Speaker	YES	
General	GPS	YES	
	WiFi	2.4G	
	Wi-Fi Support	YES	
	Resolution	Front: 2K (2560*1440) Rear: 1080P (1920*1080)	video: 1440p (2560*1440) video: 1080P (1920*1080)
	Max. Resolution	Front: 2K (2560*1440) Rear: 1080P (1920*1080)	video: 1440p (2560*1440) video: 1080P (1920*1080)
	Video Compression	none	
	FOV	Front: 123° (D), 105° (H), 56° (V) Rear: 124° (D), 102° (H), 53° (V)	
	Camera Dimension	250mm x 70mm x 20mm (9.84" x 2.75" x 0.78")	
	Camera Weight	342g (0.75 lb)	
	Software Reset	YES	
	Online	YES	

Upgrade	
Power Consumption and Current	Approx. 5W
Power Supply	4.7 V ~ 5.3 V DC
Power Interface	Type-C
Working temperature	-20 °C to 70 °C (-4 °F to 158 °F)
Working humidity	20% to 70%
Storage	TF card, Max to 128 GB
Display	LCD Resolution: 720P, (1280*320) Size: 9.35 inch Display: IPS Screen Brightness: 600 cd/m2
OSD	Display operation menu
Image format	JPEG
Local Storage	NO
ADAS	NO
Speech recognition	YES

▪ **Available Model**

AE-DC4928-N6PRO(海外标配),AE-DC4928-N6PRO(海外标配)(降压线),

▪ **Dimension**

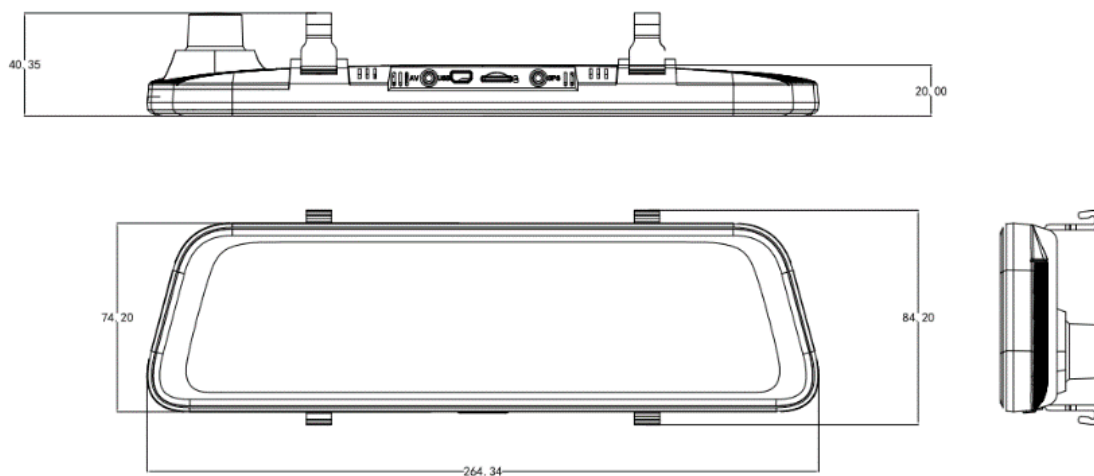

▪ **Accessory**

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

