

BPSE192V75ART3U/BPSE192V75ART3UOA

EXTENDED BATTERY MODULE TO PROLONG RUNTIME

The battery module ensures extended system runtime during power outages


Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The sealed lead-acid batteries used within the EBMs are stable and safe, which ensure the power system's reliable performance.

SERIES FEATURES

- Rack/Tower Convertible Configurations
- EBM Expansion Capability
- Sealed Lead-acid Batteries
- Metal Housing

PRODUCT CALLOUTS

- 1 . On-board Replaceable Fuse Cover
- 2 . DC Output Connector
- 3 . Battery Input Terminal Block

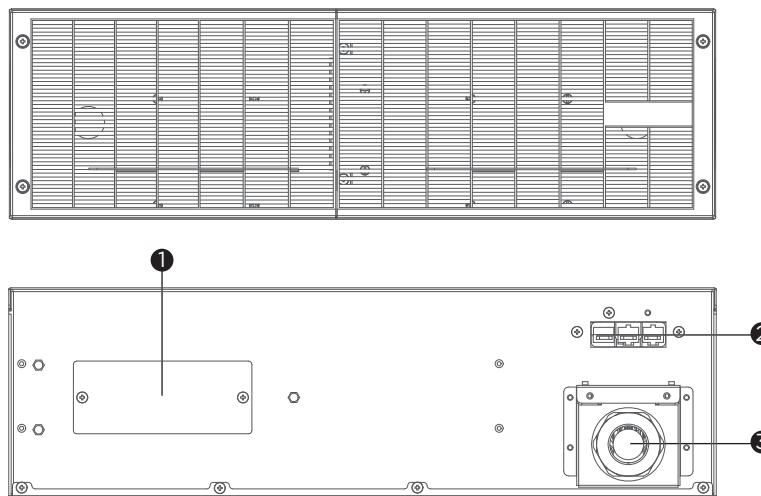

BPSE192V75ART3U/BPSE192V75ART3UOA

TECHNICAL SPECIFICATIONS

Model Name	BPSE192V75ART3U	BPSE192V75ART3UOA
General		
Nominal Output Voltage (Vdc)	192	
Rated Output Current (A)	75	
Battery		
Battery Type	Sealed Lead-acid	
Built-in Charger	No	
Typical Recharge Time (Hours)	7 (Depends on Connected UPS)	
User-replaceable	No	
Expansion Ready	Yes	
Compatible UPS	OLS6000ERT6UA	OLS10000ERT6UA
Physical		
Form Factor	Rackmount, Tower	
Physical Size		
Dimensions (WxHxD) (mm.)	438 x 130.5 x 680	
Weight (kg.)	47.2	55.5
Installed Rack Height (U)	3	
Environmental		
Operating Temperature (°C)	0 - 40	
Operating Relative Humidity (Non-condensing) (%)	0 - 90	
Certifications		
Certifications*	CE, EAC	
RoHS	Yes	

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
 #All specifications are subject to change without notice.