

BPSE240V47A
BPSE240V47AOA

EXTENDED BATTERY MODULE TO PROLONG RUNTIME

The battery module ensures extended system runtime during power outages


Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The sealed lead-acid batteries used within the EBMs are stable and safe, which ensure the power system's reliable performance.

SERIES FEATURES

- Tower Form Factor
- EBM Expansion Capability
- Sealed Lead-acid Batteries
- Metal Housing

PRODUCT CALLOUTS

- 1 . On-board Replaceable Fuse Cover
- 2 . DC Output Connector
- 3 . Battery Input Terminal Block
- 4 . Self-locking Frame

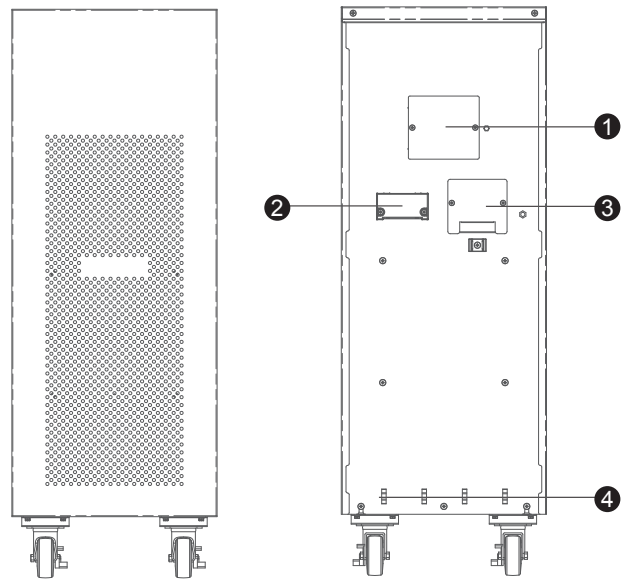

BPSE240V47A/BPSE240V47AOA

TECHNICAL SPECIFICATIONS

Model Name	BPSE240V47A	BPSE240V47AOA
General		
Nominal Output Voltage (Vdc)	240	240
Rated Output Current (A)	47	47
Battery		
Battery Type	Sealed Lead-acid	Sealed Lead-acid
Built-in Charger	No	No
Typical Recharge Time (Hours)	4 (Depends on Connected UPS)	5 (Depends on Connected UPS)
User Replaceable	No	No
Compatible UPS Models	OLS6000E, OLS6000EXL	OLS10000E, OLS10000EXL
Physical		
Form Factor	Tower	Tower
Physical Size		
Dimensions (WxHxD) (mm.)	260 x 718 x 550	260 x 718 x 550
Weight (kg.)	105	116
Environmental		
Operating Temperature (°C)	0 - 40	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 90	0 - 90
Certifications		
Certifications*	CE	CE
RoHS	Yes	Yes

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.