

EXTENDED BATTERY MODULE TO PROLONG RUNTIME

The battery module ensures extended system runtime during power outages



Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The sealed lead-acid batteries used within the EBMs are stable and safe, which ensure the power system's reliable performance.

SERIES FEATURES

- Rack/Tower Convertible Configurations
- EBM Expansion Capability
- User-replaceable Batteries
- Metal Housing

PRODUCT CALLOUTS

- 1 . On-board Replaceable Fuse Cover
- 2 . DC Output Connector
- 3 . Battery Input Terminal Block

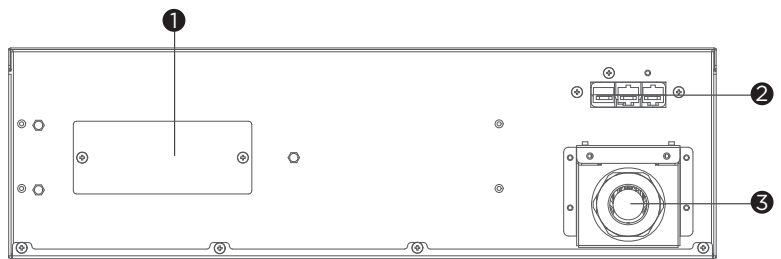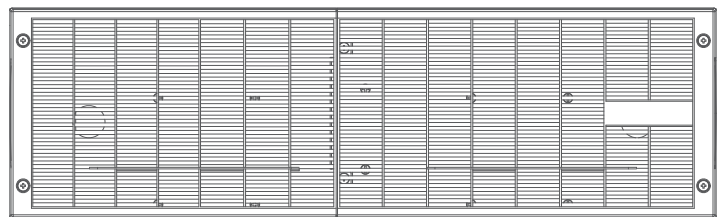

BPSE240V75ART3U

TECHNICAL SPECIFICATIONS

Model Name	BPSE240V75ART3U
General	
Nominal Output Voltage (Vdc)	240
Rated Output Current (A)	75
Battery	
Battery Type	Sealed Lead-acid
Built-in Charger	No
Typical Recharge Time (Hours)	7 (Depends on Connected UPS)
User Replaceable	No
Compatible UPS Models	OLS6000ERT6U, OLS6000ERT6UM, OLS6000ERTXL3U
Physical	
Form Factor	Rack/Tower
Physical Size	
Dimensions (WxHxD) (mm.)	438 x 130.5 x 680
Weight (kg.)	55
Installed Rack Height (U)	3
Environmental	
Operating Temperature (°C)	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 90
Certifications	
Certifications*	CE
RoHS	Yes

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.