

CPS7500PRO

Emergency Power Systems

No More Need for the Worst-Case Scenario



- | | | |
|---------------|----------------|------------------|
| LCD Display | AVR | External Battery |
| Manual Switch | Pure Sine Wave | SNMP/HTTP |

CyberPower Inverter/ Emergency Power System (EPS) utilize state-of-art Microcontroller technology for the supply of lighting, generator, heater, refrigerator, motor, and other apparatus to provide resources during crisis or failure of regular systems. Pure Sine Wave output with the adjustable AVR feature is highly flexible to supply continuous power to various types of loads under all kinds of environments. The large LCD panel showcases comprehensive information including load level, battery level, voltage and other vital equipment status with a push-of-a-button.


The competitive design has not only make it the best choice generators but flexible enough to be adopted as UPS for computers and other sensitive equipment.

APPLICATIONS

- Electric Lighting
- Generator
- Heating System
- Refrigerator
- Motor
- Pump

SERIES FEATURES

- Noiseless, Fuel and Maintenance Free
- High Charging Current for Quick Recharging - Up to 5 times faster
- Bypass Mode Allows for Charge Only
- Generator Compatible Allows Longer Runtime
- Unlimited Battery Expansion Capability to Increase Runtime
- UPS Function for Auto-Changeover
- Affordable DC Input Voltage- Minimum 12V battery required
- Automatic Voltage Regulator (AVR)
- Brownout and Over Voltage Protector
- Multifunction LCD Readout
- Wheel & Carry Handle available
- Small & Light in Dimension
- Reverse Polarity Warning
- Manual Switch
- SNMP/HTTP Remote Management Capability



Automatic Voltage Regulation


Automatic Voltage Regulation provides clean, consistent AC power by automatically regulating low voltages and over voltages, within defined tolerances, when incoming utility power has minor fluctuations.



PowerPanel® Business Edition Auto-shutdown Software

PowerPanel® Business Edition Management Software, is compatible with Windows8, 7, Vista, XP, 2000, Windows Server 2012, 2008, 2003, VMware Esxi, Citrix XenServer, Linux and Mac.

Pure Sine Wave Output



For applications which require the highest level of line clarity for proper function, CyberPower Inverter/Emergency Power System are the perfect choices with its quality Pure Sine Wave output. They are designed for electronic devices that have Power Factor Correction (PFC) Power Supplies as well as for small AC motors and other devices that need true sine-wave power in order to function properly.

*Software functions may vary due to firmware version and/or hardware constraints.

TECHNICAL SPECIFICATION

Model	CPS7500PRO
Configuration	
Capacity (VA / Watts)	7500 / 5250
Input	
Frequency Range	50/60Hz ± 5Hz (Auto-sensing)
DC Input Voltage	48V
Battery Pack Expansion	Yes
Output	
Number of Phase	Single Phase
UPS Outlets (Numbers)	(2) Schuko + (1) Terminal Block or (2) UK + (1) Terminal Block or (2) FR + (1) Terminal Block
On Battery Output Voltage	Pure Sine Wave at 220 Vac +/- 10%
On Battery Output Frequency	50 Hz / 60 Hz +/- 1%
Over Voltage Protection	Yes
Transfer Time (Typical)	< 10 ms
Overload Protection	On Utility: Circuit Breaker / On Battery: Internal Current Limiting
AVR	Single Boost & Single Buck
Charging Current	45Amps
Manual Switch Mode	Normal / Bypass with AVR / Bypass / Off
Surge Protection and Filtering	
Lightning / Surge Protection	Yes
Physical	
Dimensions (W x H x D) (mm)	355 x 370 x 440
Weight (kg)	57.0
Wheels	Yes
Status Indicators	
Indicators	Power On
Audible Alarms	On Battery, Low Battery, Overload, Overcharge, Overheat
Multi-function LCD Readout	Yes
Communication	
Management Software	PowerPanel® Business Edition
Management	
Connectivity Ports	Yes, with optional USB or Serial or SNMP Card (RMCARD202/203)
SNMP/HTTP Capable	Yes

©2015 CyberPower Systems. All specifications are subject to change without notice.

LOAD RUNTIME


Battery Model	Loading Type	Loading (Watts)	4 Batteries	8 Batteries	12 Batteries	16 Batteries	20 Batteries
			Runtime in hours				
CPS7500PRO 200AH/48V	25%	1313	5hrs 53mins	12hrs09mins	19hrs 15mins	27hrs59min	38hrs7mins
	50%	2625	2hrs47mins	5hrs57mins	9hrs 44mins	14hrs09mins	19hrs16mins
	75%	3938	1hrs39mins	3hrs38mins	6hrs 16mins	9hrs06mins	12hrs25mins
	100%	5250	1hrs06mins	2hrs43mins	4hrs 20mins	6hrs18mins	8hrs35mins

LOAD CHART

Appliance	Energy Saving Lamp	Standing Fan	32"LCD TV	Fridge/Freezer	Desktop PC	1.5HP Air Conditioner	Recommend EPS Models
Option 1	2	2	1	0	1	0	CPS600E
Option 2	4	4	1	1	1	0	CPS1000E
Option 3	6	4	2	1	2	0	CPS1500PIE
Option 4	8	2	2	1	2	0	CPS3500PIE/CPS3500PRO
Option 5	10	1	2	2	2	1**	CPS5000PIE/CPS5000PRO
Option 6	15	2	3	2	2	1***	CPS7500PIE/CPS7500PRO

*Load may vary depending on the condition of the appliance.

** 12,000 BTU *** 18,000 BTU

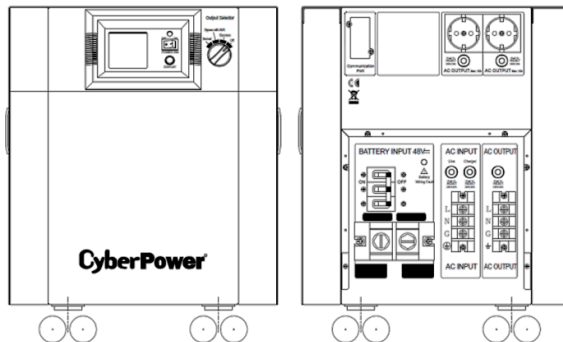

Front Panel

Back Panel

