

Ruijie RG-S2910XS-E Switch Series Datasheet

Ruijie RG-S2910XS-E is a collection of next-gen Gigabit switches architected for superior security, switch delivers non-blocking / wire-speed, high performance and outstanding energy efficiency. The series delivers full Gigabit access and unparalleled scalability to 10G performance. With the all-new hardware architecture and Ruijie's latest RGOS11.X modular operating system, the RG-S2910XS-E switches offer larger table capacity, faster hardware processing performance and a better operation experience than anything previous. In addition, the PoE models in various specifications support all downlink ports running on PoE+ and fulfill high bandwidth demand of 10G uplink. The RG-S2910XS-E switches guarantee high-density user access and leading aggregation performance with ease.

HIGHLIGHTS

- 4 NeverDie High Reliability Technology: NFPP, XCor, VSU, XSurge
- Up to 67+ Year MTBF (Mean Time Between Failure)
- Lifetime Free Cloud Management
- Built-in Layer 3 Routing Support
- Power Redundancy Support



RG-S2910-24GT4XS-E



RG-S2910-10GT2SFP-P-E



RG-S2910-48GT4XS-E



RG-S2910C-24GT2XS-HP-E



RG-S2910C-48GT2XS-HP-E

PRODUCT FEATURES

Carrier-class Reliability

All Ruijie enterprise switches including S2910, S5750 and above series are built-in with the below 4 NeverDie technologies, without additional cost and licensing fee, offering supreme reliability for enterprise campus environment.


Firstly, XCor and XSurge are the hardware design principles to guarantee stable operation even in operating environments with power instability, high humidity, dust and corrosion. Moreover, NFPP technology is Ruijie's patented network protection for foundation protection against network DDoS. Lastly, VSU, which is Ruijie's switching virtualization technology, allows up to 9 devices to be unified as one virtual unit, simplifying network management and shortening the network convergence time by Multi-link aggregation (MLAG) technology.



4 NeverDie Technologies

Conformal Coating + Anti-Sulfur Resistors Protection

In environments with corrosive gas or high humidity, corrosion of electronic products will accelerate, affecting the reliability and shortening the lifetime. However, the deployment environments of access switches are different. There may be lack of temperature and humidity regulations, close to the source of pollution or the sea. Through the design for durability, all Ruijie enterprise switches have applied conformal coating and anti-sulfur resistors design, resulting in excellent insulation and protection against moisture, dust, corrosion, and salt spray to enhance environmental adaptability.

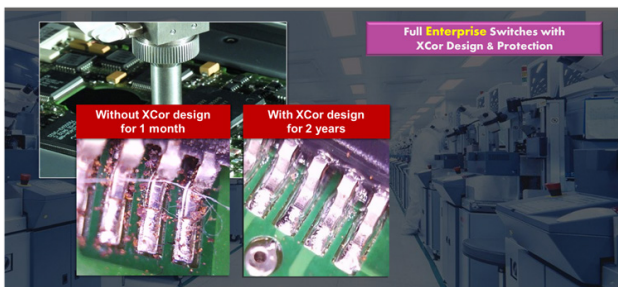

Full series of enterprise switches provide XCor protection

XSurge Power Protection

The XSurge power protection is important for protecting the critical communication system connected via the access switches. The surge protection offers up to 6kV lightning protection for the power supply and up to 8kV lightning protection for the

communication port, which guarantees high-quality power supply with operating temperature from 0 °C to 50 °C.




NFPP Security Protection

The Network Foundation Protection Policy (NFPP) is Ruijie's patented protection system for enhancing the anti-attack capability of a switch. When a switch encounters malicious attacks, NFPP employs a series of countermeasures, such as rate-limiting, identifying and isolating the attack source, to ensure the normal control and management flows of the system, thereby protecting the computing and channel resources of the switch CPU.

More info:

Whitepaper download: https://ruijienetworks.com/service/document_40294

Live Demo: https://youtu.be/d5_vXk0WBmk

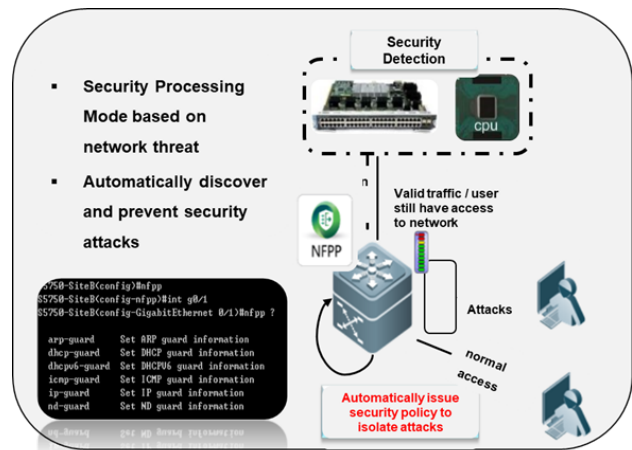


NFPP Network Security Protection

VSU Virtualization - Multi-Chassis Link Aggregation

All the RG-S2910XS-E/P models support Virtual Switch Unit (VSU) technology. It enables interconnection of several physical devices and virtualizes them into one logical unit. The logical device uses one single IP address, Telnet process, command-line interface (CLI), and enables auto version checking and configuration. From the user perspective, there is only one device to be managed and

yet user can visualize benefits offered by several devices. Work efficiency and user experience are hence greatly enhanced. The VSU technology also offers multiple benefits below:

- **Easy management:** Administrators can centrally manage all the devices at the same time. It is no longer necessary to configure and manage the switches one by one.
- **Simplified typology:** The VSU is regarded as one switch in the network. By connection of aggregation link and peripheral network devices, MSTP protocol is unnecessary as there is no Layer 2 loop network. All protocols operate as one switch.
- **Millisecond failover:** The VSU and peripheral devices are connected via the aggregation link. Upon failure event of any device or link, failover to another member link requires only 50 to 200ms.
- **100% Utilization for ALL Uplink Bandwidth:** The network is hot swappable. Any devices leaving or joining the virtualized network cause zero impact on other devices.

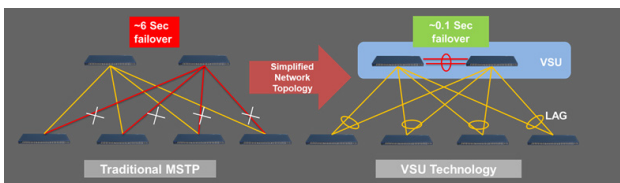

Ruijie VSU: Make complex things simple | Seamless Network Service Failover


Premier Scalability

All the SFP+ and SFP ports in the RG-S2910XS-E/P series are backwards compatible with lower level modules. The PoE models complying with 802.3af and 802.3at standards offer dual modular power supplies, supporting PoE+ on all the downlink ports. With the diverse quantities of expansion slots, the RG-S2910XS-E/P series is scalable to various Gigabit fiber and copper port combinations for unparalleled expansion flexibility.

Hardware Highlights


Interfaces

1. Console Port
2. USB 2.0 Port
3. 24 10/100/1000BASE-T (PoE/PoE+) Ports
4. 2 100/1000BASE-X SFP Ports (Combo)
5. 2 1G/10GBASE-X SFP+ Ports (Non-combo)
6. 2 Expansion Slots
7. 2 Modular Power Slots

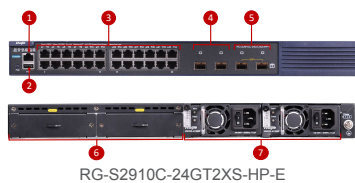

Interfaces

1. Console Port
2. USB 2.0 Port
3. 48 10/100/1000BASE-T (PoE/PoE+) Ports
4. 2 100/1000BASE-X SFP Ports (Combo)
5. 2 1G/10GBASE-X SFP+ Ports (Non-combo)
6. 2 Expansion Slots
7. 2 Modular Power Slots

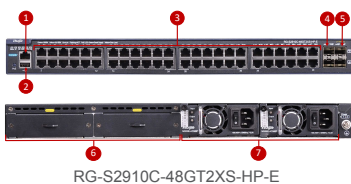

Hardware Highlights of the RG-S2910XS-E/P Series

Carrier-class Redundancy

The 802.1D, 802.1w and 802.1s Spanning Tree Protocols guarantee fast convergence and improves fault tolerance. These also maintain stable network operation and link load balancing. The feature ensures optimal network channel usage and improves redundant link utilization.

Virtual Router Redundancy Protocol (VRRP) is also available for network stability.

Another method to guarantee smooth network operation is Rogue Location Discovery Protocol (RLDP). The technology quickly detects link interruption and fiber link unidirectionality. It also prevents loop failure caused by connecting a hub or other devices to the port.

Ethernet Ring Protection Switching (ERPS) (G.8032) implements loop blocking and link recovery on the master device. Other devices directly report link status to the master device. Without passing through other standby devices, the failover time of loop interruption and recovery is hence faster than STP. The ERSP's link failover rate can be completed within milliseconds under ideal conditions.

With STP disabled, the basic link redundancy can still be maintained via Rapid Ethernet Uplink Protection Protocol (REUP). It enables even faster millisecond failover protection than that of the STP.

Software-defined Networking (SDN)

The RG-S2910XS-E switch series fully supports OpenFlow 1.3. It can fully collaborate with Ruijie's proprietary SDN controller to form a large-scale Layer 2 framework with ease. The feature ensures a smooth upgrade to SDN network. The RG-S2910XS-E series greatly simplifies the network management and minimizes deployment costs.

Energy Efficiency

Ruijie has put unswerving research effort in solving noise and energy consumption problems of conventional switches. The new RG-S2910XS-E switch series offers a total solution for such problems, providing a quieter work environment and resolving heavy energy use caused by the deployment of a large number of devices.

The RG-S2910XS-E switches adopt next-gen hardware architecture with an advanced energy-saving circuit design and component selection. The switches offer an overall energy deduction of 40%+ for maximized cost savings. Noise pollution level is also greatly reduced. All models in the series deploy axial flow fans supporting speed adjustment. The fans enable intelligent temperature control based on current ambient temperature. The design totally ensures stable operation, and minimizes power consumption and noise level at the same time.

Under the environment of PoE power supply, the RG-S2910XS-E switches offer auto, energy-saving and static modes to deal with various deployment challenges.

The auto-power-down mode is another feature highlight. When

an interface is down for a certain period of time, the system will automatically power down that interface for extra energy efficiency. The switch series also supports an EEE energy saving function. The system will automatically turn an idle port into energy-saving mode. The system will regularly issue listening streams to the port. It will resume service upon receiving a new packet.

The RG-S2910XS-E switch series complies with RoHS standards adopted by the European Union on restricting the use of hazardous materials in the manufacture process. The series also fulfills SJ/T 11363/11364/11365 standards.

Simple and Easy Network Maintenance

The RG-S2910XS-E switch series supports varieties of management including central cloud management from small to large-scale remote sites.

Traditionally, Ruijie enterprise switches provide command-line interface (CLI) and web management, which are more suitable for single device or small campus management. For large-scale campus, Ruijie provides 2 central management offerings:

a) On-premises Network Management System Cloud Management (i.e. RG-SNC, order separately)


For details, please visit RG-SNC website at: <https://www.ruijienetworks.com/products/software/network-management-software/RG-SNC-Smart-Network-Commander>

b) Public Cloud Management (i.e. Ruijie Cloud – Lifetime Free)


For details, please visit Ruijie Cloud website at: <https://www.ruijienetworks.com/products/smb/cloud-service/cloud-service/ruijie-cloud-solution>

Mobile Monitoring and Optimizing

Ruijie is committed to providing more simple networking experience for customers by launching a free mobile app (namely Ruijie Cloud) for unified device lifecycle management, which is not only for Ruijie access points, but also for switches and security gateways, from provisioning, monitoring, configurations to optimization. For details, please visit our official website at <https://www.ruijienetworks.com/products/smb/cloud-service/cloud-service/ruijie-cloud-solution/mobile-app>

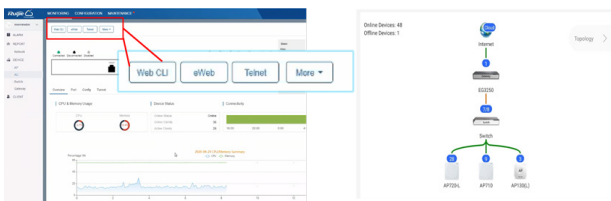

Ruijie Cloud built-in with rich unified Monitoring / Configuration / Authentication / Reporting features

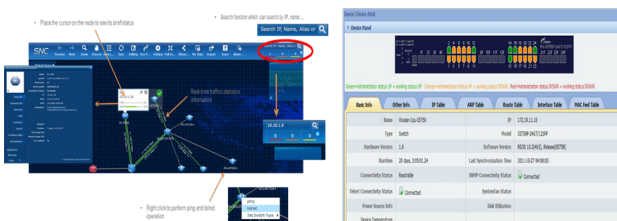

Ruijie RG-SNC is an on-premises network management system solution with user friendly GUI

TECHNICAL SPECIFICATIONS

Model	RG-S2910-24GT4XS-E	RG-S2910-48GT4XS-E	RG-S2910-10GT2SFP-P-E	RG-S2910C-24GT2XS-HP-E	RG-S2910C-48GT2XS-HP-E
Ports	24 10/100/1000 BASE-T ports 4 1G/10GBASE-X SFP+ ports (non-combo)	48 10/100/1000 BASE-T ports 4 1G/10GBASE-X SFP+ ports (non-combo)	10 10/100/1000 BASE-T ports 2 100/1000BASE-X SFP ports (non-combo)	24 10/100/1000 BASE-T ports (PoE/PoE+) 2 100/1000BASE-X SFP ports (combo) 2 1G/10GBASE-X SFP+ ports (non-combo)	48 10/100/1000 BASE-T ports (PoE/PoE+) 2 100/1000BASE-X SFP ports (combo) 2 1G/10GBASE-X SFP+ ports (non-combo)
Expansion Slots	N/A	N/A	N/A	2	2
Modular Power Slots	N/A	N/A	N/A	2	2
Fan Slots	Fixed	Fixed	Fanless	Fixed	Fixed
Expansion Modules	N/A	N/A	N/A	M2910-01XS	M2910-01XS
Management Ports	1 console port	1 console port	1 console port	1 console port 1 USB 2.0 port	1 console port 1 USB 2.0 port
Switching Capacity	264Gbps	264Gbps	256Gbps	264Gbps	264Gbps
Packet Forwarding Rate	96Mpps	132Mpps	18Mpps	96Mpps	132Mpps
Max. Number of 10GE Ports	4	4	N/A	4	4
PoE	N/A	IEEE802.3af and 802.3at power supply standards; Automatic/energy-saving (default) power supply mode; Hot startup and uninterrupted power supply; Port priority; PoE devices support stacking			
Port Buffer	1.5MB				
RAM	512MB				
ARP Table	1,000	1,000	500	1,000	1,000
MAC Address	16K				
Routing Table Size (IPv4/IPv6)	500 (IPv4/IPv6)	500 (IPv4/IPv6)	64 (IPv4/IPv6)	500 (IPv4/IPv6)	500 (IPv4/IPv6)
ACL Entries	In: 1,500 Out: 500	In: 1,500 Out: 500	In: 750 Out: N/A	In: 1,500 Out: 500	In: 1,500 Out: 500
VLAN	4K 802.1q VLANs, Port-based VLAN, MAC-based VLAN, Protocol-based VLAN, Private VLAN, Voice VLAN, QinQ, IP subnet-based VLAN, GVRP, Guest VLAN				
QinQ	Basic QinQ, Flexible QinQ, N:1 VLAN switching ³ , 1:1 VLAN switching ⁴				
Link Aggregation	AP, LACP (maximum 8 ports can be aggregated), Cross devices AP, Flow balance				
Port Mirroring	Many-to-one mirroring, One-to-many mirroring, Flow-based mirroring, Over devices mirroring, VLAN-based mirroring, VLAN-filtering mirroring, AP-port mirroring, RSPAN, ERSPAN # RG-S2910-10GT2SFP-P-E supports N:1/1:N port mirroring, Flow-based mirroring				
Spanning Tree Protocols	IEEE802.1d STP, IEEE802.1w RSTP, Standard 802.1s MSTP, Port fast, BPDU filter, BPDU guard, TC guard, TC protection, ROOT guard, Spanning Tree Root Guard (STRG)				
DHCP	DHCP server, DHCP client, DHCP snooping, DHCP relay, IPv6 DHCP snooping, IPv6 DHCP client, IPv6 DHCP relay, DHCP Snooping Option 82				
Multiple Spanning Tree Protocol (MSTP) Instances	64				

Note:

¹⁻⁴ Future release support

Model	RG-S2910-24GT4XS-E	RG-S2910-48GT4XS-E	RG-S2910-10GT2SFP-P-E	RG-S2910C-24GT2XS-HP-E	RG-S2910C-48GT2XS-HP-E
Maximum Aggregation Port (AP)	128				
SDN	OpenFlow 1.0 & 1.3				
VSU (Virtual Switch Unit)	Support (up to 9 stack members to ensure the effectiveness of the use, 4 members are recommended), Local and distant stacking, Cross-chassis link aggregation in the stack, Stacking via 10G Ethernet ports # All models support the features above except RG-S2910-10GT2SFP-P-E				
Zero Configuration	CWMP(TR069)				
L2 Features	MAC, EEE, ARP, VLAN, Basic QinQ, Felix QinQ, Link aggregation, Mirroring, STP, RSTP, MSTP, Broadcast/Multicast/Unknown unicast storm control, IGMP v1/v2/v3 snooping, IPv6 MLD Snooping v1/v2, IGMP SGVL/IVGL, IGMP querier, IGMP filter, IGMP fast leave, DHCP, Jumbo frame, RLDP, LLDP, REUP, G.8032 ERPS, Layer 2 protocol tunnel				
Layer 2 Protocols	IEEE802.3, IEEE802.3u, IEEE802.3z, IEEE802.3x, IEEE802.3ad, IEEE802.1p, IEEE802.1x, IEEE802.3ab, IEEE802.1Q (GVRP), IEEE802.1d, IEEE802.1w, IEEE802.1s				
IPv4 Features	Ping, Traceroute				
IPv6 Features	ICMPv6, IPv6 Ping, IPv6 Tracert, Manually configure local address, Automatically create local address				
IPv4 Routing Protocols	Static Routing, RIP, OSPF v1/v2				
Basic IPv6 Protocols	IPv6 addressing, Neighbor Discovery (ND), ICMPv6, IPv6 Ping and IPv6 Tracert				
IPv6 Routing Protocols	Static routing, RIPng, OSPF v3				
G.8032	Support				
ACL	Standard/Extended/Expert ACL, Extended MAC ACL, ACL 80, IPv6 ACL, ACL logging, ACL counter, ACL remark, Global ACL, ACL redirect, Time-based ACL, Router ACL, VLAN ACL, Port-Based ACL				
QoS	802.1p/DSCP/TOS traffic classification; Multiple queue scheduling mechanisms, such as SP, WRR, DRR, SP+WFQ, SP+WRR, SP+DRR; Input / output port-based speed limit; Port-based traffic recognition; Each port supports 8 queue priorities; flow-based rate limiting with the minimum granularity of 8Kbps, Dynamic QoS				
Reliability	VSU (virtualization technology for virtualizing multiple devices into 1); RIP GR; ERPS (G.8032); REUP dual-link fast switching technology; RLDP (Rapid Link Detection Protocol)	VSU (virtualization technology for virtualizing multiple devices into 1); RIP GR; ERPS (G.8032); REUP dual-link fast switching technology; RLDP (Rapid Link Detection Protocol)	RIP GR; ERPS (G.8032); REUP dual-link fast switching technology; RLDP (Rapid Link Detection Protocol)	VSU (virtualization technology for virtualizing multiple devices into 1); RIP GR; ERPS (G.8032); REUP dual-link fast switching technology; RLDP (Rapid Link Detection Protocol); 1+1 power redundancy; Hot-swappable power module	VSU (virtualization technology for virtualizing multiple devices into 1); RIP GR; ERPS (G.8032); REUP dual-link fast switching technology; RLDP (Rapid Link Detection Protocol); 1+1 power redundancy; Hot-swappable power module
EEE Format	Support IEEE 802.3az standard				
Security	Binding of the IP address, MAC address, and port address; Binding of the IPv6, MAC address, and port address; Filter illegal MAC addresses; Port-based and MAC-based 802.1x; MAB; Portal and Portal 2.0 authentication; ARP-check; DAI; Restriction on the rate of ARP packets; Gateway anti-ARP spoofing; Broadcast suppression; Hierarchical management by administrators and password protection; RADIUS and TACACS+; Change of Authorization; AAA security authentication (IPv4/IPv6) in device login management; SSH and SSH V2.0; BPDU guard; IP source guard; CPP, NFPP; Port protection, CoA (RADIUS change of authorization), SCP (Secure Copy), Dynamic ARP Inspection(DAI)				
Manageability	SNMPv1/v2c/v3, CLI (Telnet / Console), RMON (1, 2, 3, 9), SSH, Syslog / Debug, NTP / SNTP, FTP, TFTP, Web, SFLOW, HTTP or HTTPS # RG-S2910-10GT2SFP-P-E supports SNMPv2c, CLI (Telnet / Console), Syslog, RMON (1, 2, 3, 9), Web				

Model	RG-S2910-24GT4XS-E	RG-S2910-48GT4XS-E	RG-S2910-10GT2SFP-P-E	RG-S2910C-24GT2XS-HP-E	RG-S2910C-48GT2XS-HP-E
Hot Patch	Support				
Smart Temperature Control	Auto fan speed adjustment; Fan malfunction alerts; Fan status check # All models support the features above except RG-S2910-10GT2SFP-P-E				
Smart Power Supply	N/A	N/A	N/A	Power management, Power monitoring	Power management, Power monitoring
Other Protocols	FTP, TFTP, DNS client, DNS static				
Dimensions (W x D x H) (mm)	440 × 260 × 43.6	440 × 260 × 43.6	340 × 260 × 44	440 × 320 × 44	440 × 360 × 44
Rack Height	1RU				
Weight	≤3.5kg	≤4kg	≤2.5kg	5.8kg (gross weight)	6.8kg (gross weight)
MTBF (hours)	>200K				
Lightning Protection on Power Port	Common Mode 6KV/Differential Mode 6KV	Common Mode 6KV/Differential Mode 6KV	Common Mode 6KV/Differential Mode 6KV	Common Mode 4KV/Differential Mode 2K	Common Mode 4KV/Differential Mode 2K
Lightening Protection on Communication Port	Common Mode 6KV				
Power Supply	<p>AC input: Rated voltage range: 100V to 240V AC Maximum voltage range: 90V to 264V AC Frequency: 50/60Hz Rated current: 1.5A</p> <p>HVDC input: Input voltage range: 192V to 290V DC Input current range: 0.5-0.1A</p>	<p>AC input: Rated voltage range: 100V to 240V AC Maximum voltage range: 90V to 264V AC Frequency: 50/60Hz Rated current: 1.5A</p> <p>HVDC input: Input voltage range: 192V to 290V DC Input current range: 0.8A to 0.5A</p>	<p>AC input: Rated voltage range: 100V to 240V AC Maximum voltage range: 90V to 264V AC Frequency: 50/60Hz Rated current: 2A</p> <p>HVDC input: Input voltage range: 192V to 290V DC Input current range: 1.0A to 0.4A</p>	<p>AC power (RG-M5000E-AC500P): Rated voltage range: 100V to 240V AC Frequency: 50/60Hz Rated current range: 7A to 3.5A</p> <p>HVDC input: Input voltage range: 192V to 290V DC Input current range: 3.5A to 2.5A</p> <p>DC power (RG-M5000E-DC500P): Rated voltage range: -36V to -72V DC Rated current: 16.5A</p> <p>AC power (RG-RG-PA1150P-F): Rated voltage range: 100V to 240V AC Frequency: 50/60Hz Rated current: 10A</p> <p>HVDC input: Input voltage range: 192V to 290V DC Rated current range: 10A</p>	<p>AC power (RG-M5000E-AC500P): Rated voltage range: 100V to 240V AC Frequency: 50/60Hz Rated current range: 7A to 3.5A</p> <p>HVDC input: Input voltage range: 192V to 290V DC Input current range: 3.5A to 2.5A</p> <p>DC power (RG-M5000E-DC500P): Rated voltage range: -36V to -72V DC Rated current: 16.5A</p> <p>AC power (RG-RG-PA1150P-F): Rated voltage range: 100V to 240V AC Frequency: 50/60Hz Rated current: 10A</p> <p>HVDC input: Input voltage range: 192V to 290V DC Rated current range: 10A</p>

Model	RG-S2910-24GT4XS-E	RG-S2910-48GT4XS-E	RG-S2910-10GT2SFP-P-E	RG-S2910C-24GT2XS-HP-E	RG-S2910C-48GT2XS-HP-E
Power Consumption	24W	50W	165W (with 8-port PoE or 4-port PoE+)	850W (with 24-port PoE+)	1700W (with 48-port PoE+)
PoE Power	N/A	N/A	125W	RG-M5000E-AC500P: 370W RG-M5000E-DC500P: 370W RG-PA1150P-F: 740W	RG-M5000E-AC500P: 370W RG-M5000E-DC500P: 370W RG-PA1150P-F: 740W
Safety Standards	IEC 60950-1, EN 60950-1				
Emission Standards	EN 300 386, EN 55022/55032, EN 61000-3-2, EN 61000-3-3, EN 55024, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11				
Temperature	Operating temperature: 0°C to 50°C	Operating temperature: 0°C to 50°C	Operating temperature: 0°C to 45°C	Operating temperature: 0°C to 50°C	Operating temperature: 0°C to 50°C
	Storage temperature: -40°C to 70°C				
Humidity	Operating humidity: 10% to 90%RH				
	Storage humidity: 5% to 95%RH				
Operating Altitude	-500m to 5,000m				


TYPICAL APPLICATION

The RG-S2910XS-E switch series features high security, efficiency and intelligence with superior energy-saving capacity. The series is suitable for the following scenarios:

- Full gigabit access to LANs of large-scale enterprises and institutions, such as government buildings, universities and large manufacturing/ energy/ metallurgy enterprises
- Full gigabit access to business systems, such as hospitals, libraries, exhibition centers and websites
- IP phones, WLAN access points and high-definition cameras access
- Full gigabit access to server clusters and 10G high-bandwidth uplink
- Secure access through flexible and diverse security control policies that can defend against network viruses and attacks


Scenario 1

The RG-S2910XS-E Series Switch is deployed with the RG-S5750E/P Series / the RG-S78E Series Aggregation Switches. Also teaming up the RG-N18K Series at the core, the deployment provides Gigabit Ethernet downlinks and 10 Gigabit Ethernet uplinks to meet the ever-increasing number of network nodes and demanding bandwidth requirements.

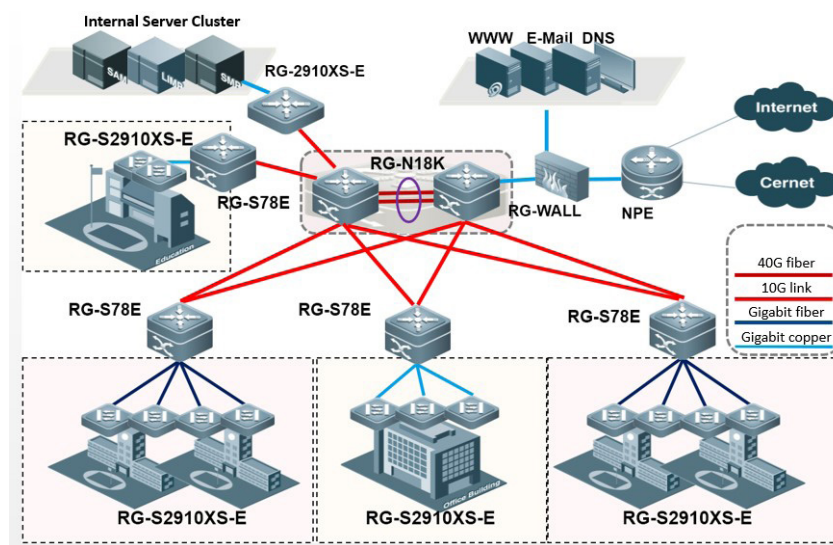

Scenario 2

The RG-S2910XS-E Series Switch can be deployed with RG-S78E Series/ RG-S86E Series/ RG-N18K Series to provide Gigabit Ethernet downlinks and 10 Gigabit Ethernet uplinks to the simplified core network architecture. Different combinations provide comprehensive coverage for network deployment of large, medium and small sizes. Not only does it simplify the network architecture, but also significantly enhances the stability and efficiency of the network system.

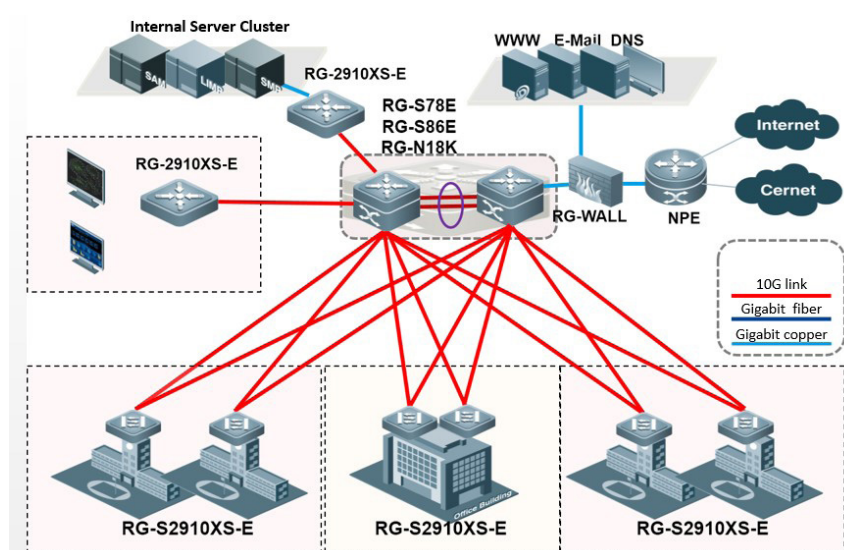

ORDERING INFORMATION

Model	Description
RG-S2910-24GT4XS-E	24 10/100/1000BASE-T Ports, 4 1G/10GBASE-X SFP+ Ports (non-combo), AC
RG-S2910-48GT4XS-E	48 10/100/1000BASE-T Ports, 4 1G/10GBASE-X SFP+ Ports (non-combo), AC
RG-S2910-10GT2SFP-P-E	10 10/100/1000BASE-T Ports, 2 100/1000BASE-X SFP Ports (non-combo), Port 1-8 support PoE/PoE+, AC
RG-S2910C-24GT2XS-HP-E	24 10/100/1000BASE-T Ports (PoE/PoE+), 2 100/1000BASE-X SFP Ports (combo), 2 1G/10GBASE-X SFP+ Ports (non-combo), 1 USB, 2 Expansion Slots, 2 Modular Power Slots, AC/DC
RG-S2910C-48GT2XS-HP-E	48 10/100/1000BASE-T Ports (PoE/PoE+), 2 100/1000BASE-X SFP Ports (combo), 2 1G/10GBASE-X SFP+ Ports (non-combo), 1 USB, 2 Expansion Slots, 2 Modular Power Slots, AC/DC
Optional Accessories	
M2910-01XS	1-Port 10G SFP+ Interface Module, for S2910XS PoE models
M2910-01XT	1-Port 10G copper Interface Module, for S2910XS PoE models
M2910-02XS	2-Port 10G SFP+ Interface Module, only for RG-S2910C-24GT2XS-P-E
RG-M5000E-AC500P	AC Power Module, 370W Power Budget for PoE, up to 24 PoE ports or 12 PoE+ ports (only for RG-S2910C-24GT2XS-HP-E and RG-S2910C-48GT2XS-HP-E)
RG-M5000E-DC500P	DC Power Module, -32V to -72V DC input voltage, 370W Power Budget for PoE, up to 24 PoE ports or 12 PoE+ ports (only for RG-S2910C-24GT2XS-HP-E and RG-S2910C-48GT2XS-HP-E)
RG-PA1150P-F	AC Power Module, 740W Power Budget for PoE, up to 48 PoE ports or 24 PoE+ ports (only for RG-S2910C-24GT2XS-HP-E and RG-S2910C-48GT2XS-HP-E)
Mini-GBIC-SX-MM850	1000BASE-SX mini GBIC Transceiver (850nm)
Mini-GBIC-LX-SM1310	1000BASE-LX mini GBIC Transceiver (1310nm)
Mini-GBIC-LH40-SM1310	1000BASE-LH mini GBIC Transceiver (1310nm, 40km)
Mini-GBIC-ZX50-SM1550	1000BASE-ZX mini GBIC Transceiver (1550nm, 50km)
Mini-GBIC-ZX80-SM1550	1000BASE-ZX mini GBIC Transceiver (1550nm, 80km)
Mini-GBIC-ZX100-SM1550	1000BASE-ZX mini GBIC Transceiver (1550nm, 100km)
XG-SFP-SR-MM850	10GBASE-SR, SFP+ Transceiver, MM (850nm, 300m, LC)
XG-SFP-LR-SM1310	10GBASE-SR, SFP+ Transceiver (1310nm, 10km, LC)
XG-SFP-ER-SM1550	10GBASE-SR, SFP+ Transceiver (1550nm, 40km, LC)
GE-SFP-LX20-SM1310-BIDI	Gigabit SFP BIDI Transceiver (TX1310/RX1550, 20km, LC)
GE-SFP-LX20-SM1550-BIDI	Gigabit SFP BIDI Transceiver (TX1550/RX1310, 20km, LC)
GE-SFP-LH40-SM1310-BIDI	Gigabit SFP BIDI Transceiver (TX1310/RX1550, 40km, LC)
GE-SFP-LH40-SM1550-BIDI	Gigabit SFP BIDI Transceiver (TX1550/RX1310, 40km, LC)
XG-SFP-AOC1M	10GBASE SFP+ Optical Stack Cable (included both side transceivers) for S2910 and S5750-H Series Switches, 1m
XG-SFP-AOC3M	10GBASE SFP+ Optical Stack Cable (included both side transceivers) for S2910 and S5750-H Series Switches, 3m
XG-SFP-AOC5M	10GBASE SFP+ Optical Stack Cable (included both side transceivers) for S2910 and S5750-H Series Switches, 5m



For further information, please visit our website: <http://www.ruijienetworks.com>

Copyright © 2020. Ruijie Networks Co., Ltd. All rights reserved. Ruijie Networks reserves the rights to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of this publication shall be applicable. If there is any inconsistency or ambiguity between this datasheet and the website, the information on the website shall prevail.