

Tiandy



TC-C35MS Spec:I5/A/E/Y/M/H/2.7-13.5mm/V4.0

5MP Starlight Motorized IR Bullet Camera

Pro Series



KEY FEATURES

- Full Metal Housing
- Motorized Lens 2.7-13.5mm
- Up to 2592x1944@30fps, 1920x1080@60fps
- S+265/H.265/H.264/M-JPEG
- Min. illumination Color: 0.002Lux@F1.6
- Smart IR, IR Range: 50m
- Support Human/Vehicle Classification
- Support Face Capture Mode
- Built-in Mic, audio1/1, alarm 2/1
- Operating Conditions -35°C~65°C, 0~95% RH
- POE, DC12V
- IP66, IK10



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com

Tel: +86-22-58596065

Website: en.tiandy.com

Fax: +86-22-58596048



SPECIFICATIONS

Camera	
Image Sensor	1/2.8"
Signal System	PAL/NTSC
Min. Illumination	Color:0.002Lux@(F1.6,AGC ON),B/W:0Lux with IR
Shutter Time	1s to 1/100,000s
Day&Night	Dual IR Cut Filter with Auto Switch
WDR	120dB
Lens	
Lens Type	Motorized
Focal Length	2.7~13.5mm
Lens Mount	Φ14
Aperture Range	F1.6,Fixed
Field of View	Horizontal field of view:94.2°~29.3°; Vertical field of view:70.3°~22°;
Illuminator	
IR LEDs	18
IR Distance	Up to 50m
Wavelength	850nm
White LEDs	N/A
Compression Standard	
Video Compression	S+ 265/H.264B/H.264M/H.264H/Motion JPEG
Video Bit Rate	32kpbs~16Mpbs
Audio Compression	G.711A/G.711U/ADPCM_D/AAC_LC
Audio Sampling Rate	8kHz/32kHz/48kHz
Image	
Max. Resolution	2592x1944
Main Stream	PAL:25fps(2592x1944,2592x1520,2560x1440,2304x1296) 50fps(1920x1080,1280x720) NTSC:30fps(2592x1944,2592x1520,2560x1440,2304x1296),60fps(1920x1080,1280x720)
Sub Stream	PAL:25fps(704x576,704x288,352x288,640x360) NTSC:30fps(704x480,704x240,352x240,640x360)
Third Stream	PAL:25fps(1920x1080,1280x720,704x576,640x360,704x288,352x288) NTSC:30fps(1920x1080,1280x720,704x480,640x360,704x240,352x240)
Image Setting	Saturation,brightness,contrast,sharpness,adjustable by client software or web browser
Image Enhancement	HLC/BLC/AGC/3D DNR
ROI	Yes,8 regions
OSD	16*16/32*32/48*48/64*64/96*96,adaptable size,Letters Such as Week,Date,Time,Total 1 Regions
Picture Overlay	Yes
Privacy Mask	Yes,4 regions
Defog	Yes

Tiandy

Feature	
Alarm Trigger	Voltage Alarm, Disk Full, Disk R/W Error, IP Address Conflict, MAC Address Conflict, FTP Server Exception, Event Input, Event Output, Motion Detection, Mask Alarm
Video Analytics	Human/Vehicle Classification, Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Heatmap, Loitering, Running, Parking, People Counting, Crowded, Safety Helmet Detection, On Duty Detection
Operating Mode	Face capture, Intelligent monitoring
Face Detection Performance	32
Network	
ANR	Yes
Protocols	HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, DHCP, DNS, DDNS, Easy DDNS, NTP, SMTP, 802.1X, QoS, IPv4, IPv6, PPPOE, SSH, Unicast, Multicast, RTCP, RTP, RTSP, ARP
System Compatibility	onvif Profile S/T/G, CGI, MILSTONE, RTMP
Remote Connection	
Client	Easy7, EasyLive Plus
Web	IE, Firefox, Edge, Safari, Chrome
Interface	
Communication Interface	1 RJ45 10M/100M self adaptive Ethernet port
Audio I/O	1/1
Alarm I/O	2/1
Built-In Mic	N/A
Built-In Speaker	N/A
Reset Button	Yes
On-board storage	Built-in TF card slot, up to 512 GB
General	
Web Client Language	18 languages English, Russian, Spanish, Korean, Italian, Turkish, Simple Chinese, Traditional Chinese, Thai, French, Polish, Dutch, Hebrew, Arabic, Vietnamese, German, Ukrainian, Portuguese
Operating Conditions	-35°C~65°C, 0~95%RH
Power Supply	DC12V, PoE (802.3af)
Power Consumption	8W
Protection	IP66, IK10
Heater	N/A
Boundary Dimensions	143x143x124mm
Package Dimensions	245x175x164mm
GrossWeight	1.16kg
NetWeight	0.88kg


* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.

Tiandy

AVAILABLE MODEL

TC-C35MS Spec:I5/A/E/Y/M/H/2.7-13.5mm/V4.0


DIMENSIONS

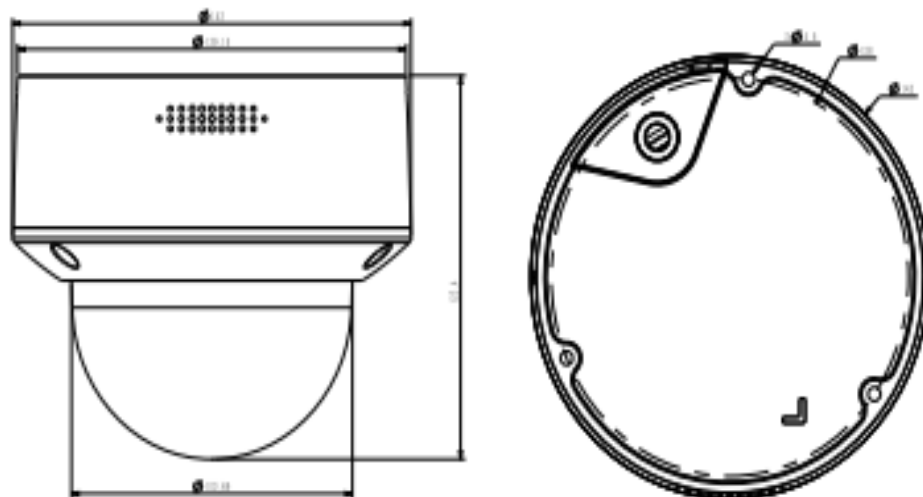

ACCESSORIES



A28
Wall Mount



TC-P54BM Spec: V3
Junction Box

DISTRIBUTED BY



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com

Tel: +86-22-58596065
Fax: +86-22-58596048