

Tiandy



TC-R3210 Spec: I/F

H.265 2HDD 10ch Face Recognition NVR

AI Series



KEY FEATURES

HD Input

- S+265/H.265/H.264 video formats
- Connectable to the third-party network cameras
- Upto 10-channel input
- Supports live view, storage, and playback of the connected camera at up to 6MP resolution

HD Output

- HDMI and VGA simultaneous outputs

HD Storage

- 2 SATA interfaces, upto 10TB
- S+265 compression effectively reduces the storage space and costs by up to 75%

HD Transmission

- 1xRJ45 self-adaptive 10/100 Mbps network interface

Various Applications

- Centralized management of IP cameras, including configuration, information import/export, real-time information display, upgrade, etc.
- 1:N people face recognition.
- Connectable to smart IP cameras from Tiandy and the recording, playback, and backing up of VCA alarms can be realized
- VCA detection alarm is supported
- Smart search for the selected area in the video and smart playback to improve the playback efficiency
- Web6 supports plug-in-free browsing and can preview videos on all browsers
- Support cloud upgrade
- Support voice broadcast




SPECIFICATIONS

Input	
Video Input	10-ch
Max Resolution	6MP
Two-way Audio Input	1-ch, 3.5mm
Bandwidth	Income 80Mbps; Outcome 80Mbps
Internet Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTSP, PPPoE, NTP, UPnP, SMTP, IGMP, Multicast
Output	
HDMI/VGA Output	HDMI: 1-ch, 1920×1080, 1280×720, 800×600, 1024×768, 1366×768, 1440×900, 1280×800 VGA: 1-ch, 1920×1080, 1280×720, 800×600, 1024×768
Screen Split	1/3/4/6/8/9/10
Audio Output	1×RCA
Decoding	
Decoding Format	S+265/H.265/H.264
Recording Resolution	6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Preview Capability	1×6MP, 1×5MP, 1×4MP, 2×3MP, 3×1080P, 5×720P, 10×4CIF
Synchronous Playback	1×6MP, 1×5MP, 1×4MP, 2×3MP, 3×1080P, 5×720P
Records Encryption	Yes
Hard Disk	
SATA	2 SATA interfaces for 2 HDDs
Capacity	Up to 10TB for each HDD
eSATA Interface	N/A
Array Type	N/A
External Interface	
Network Interface	1×RJ45 self-adaptive 10/100 Mbps network interface
USB Interface	2×USB 2.0
Serial Interface	N/A
Alarm In/Out	0/1
Reliability	
N+M Hot Standby	N/A
ANR	N/A
Face Recognition	
Base Libraries	32
Face Pictures	10,000
Video Stream for Recognition	1
Picture Stream for Recognition	5
Face Picture Search	Yes
General	
Web Version	Web6
Language	English, Simple Chinese
Operating Conditions	-10°C ~ 55°C, 10%~90% RH
Power Supply	DC12V 3.33A
Consumption (without HDD)	≤10W (without HDD)
Chassis	1U
Dimensions	45.1×255×231 mm (1.78×10.04×9.09 inch)
Weight (without HDD)	1.55Kg (3.42lb)
Certification	CE, FCC


AVAILABLE MODEL

TC-R3210 SPEC: I/F

DIMENSIONS (Unit: mm)

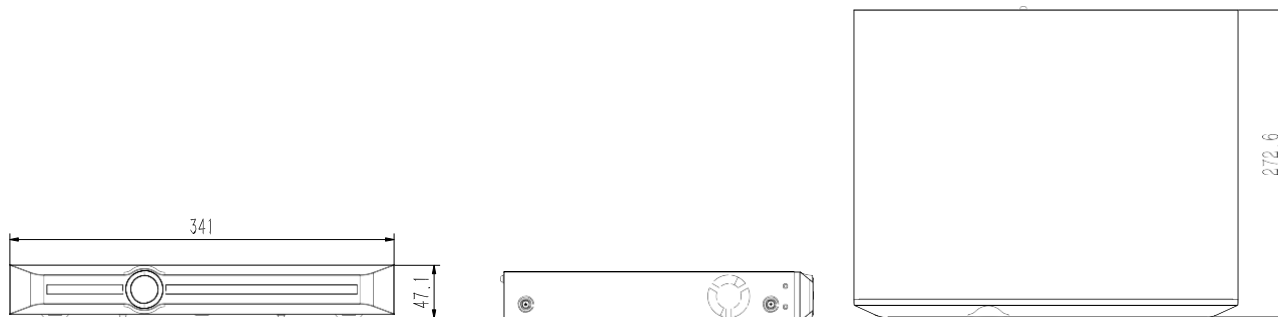

Physical Interfaces

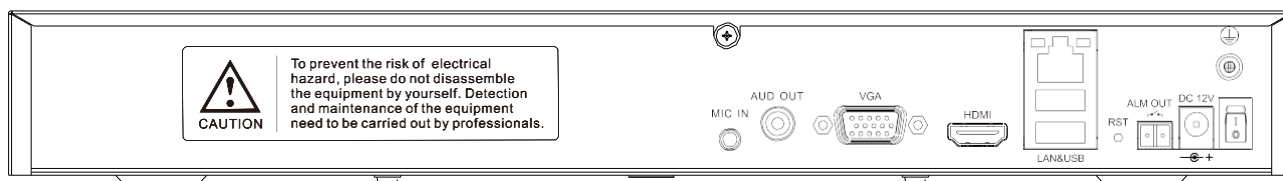

DISTRIBUTED BY



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com

Tel: +86-22-58596065

Website: en.tiandy.com

Fax: +86-22-58596048