

DS-K1T671M Face Recognition Terminal



- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- Face mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance is valid
- 7-inch LCD touch screen, 2 Mega pixel wide-angle lens, built-in M1 card reading module
- Face recognition distance (without face mask): 0.3 m to 3 m, Duration < 0.2 s/User, Accuracy rate ≥ 99%
- Max.6000 faces, Max.6000 cards
- Two-way audio with client software, indoor station, and main station
- Supports TCP/IP
- Configuration via the web client
- Supports ISAPI and ISUP5.0 protocol
- IP65



▪ Specification

| System | |
|--------------------------------|---|
| Operation system | Linux |
| Display | |
| Dimensions | 7-inch |
| Type | LCD |
| Operation method | Capacitive touch screen |
| Video | |
| Pixel | 2 MP |
| Lens | 2 |
| Audio | |
| Tone quality | Noise suppression and echo cancellation |
| Network | |
| Wired network | 10 M/100 M/1000 M self-adaptive |
| Interface | |
| Network interface | 1 |
| RS-485 | 1 |
| Wiegand | 1 |
| Lock output | 1 |
| Exit button | 1 |
| Door contact input | 1 |
| IO input | 2 |
| IO output | 1 |
| Power interface | 2-pin |
| TAMPER | 1 |
| USB | 2 |
| Capacity | |
| Card capacity | 6000 |
| Face capacity | 6000 |
| Event capacity | 50,000 |
| Authentication | |
| Card type | M1 card |
| Card reading frequency | 13.56MHz |
| Card reading distance | 0 to 5 cm |
| Face recognition duration | < 0.2 s per person |
| Face recognition accuracy rate | ≥ 99% |
| Face recognition distance | 0.3 to 3 m (Without face mask) |
| Function | |
| Face anti-spoofing | Support |
| Advertisement | Support |
| Audio prompt | Support |
| Time synchronization | Support |


General

| | |
|---------------------|--|
| Power supply method | 2-pin connecter |
| Power supply | 12 VDC/2 A |
| Working temperature | -30 °C to 60 °C (-22 °F to 140 °F) |
| Working humidity | 10 to 90% (No condensing) |
| Dimensions | 239 mm × 116.5 mm × 33 mm (9.4" × 4.6" × 1.3") |
| Protective level | IP65 |
| Installation | Surface |
| Language | English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil) |
| Platform | Hik-ProConnect and HikCentral Professional |

▪ **Available Model**

DS-K1T671M



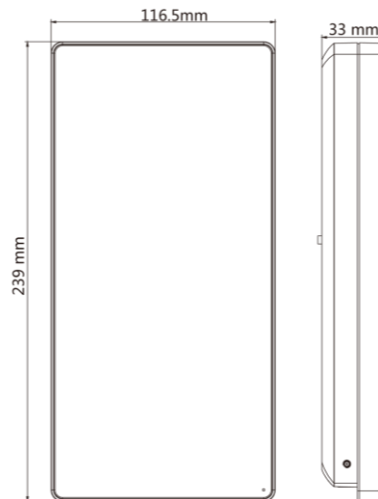




▪ **Dimension**



Without Fingerprint Module

▪ **Accessory**

▪ **Optional**

| DS-K3H4411-120 | DS-KAB671F Fingerprint Module | DS-KAB671-S Protective Shield | DS-KAB671-P1 | DS-K3H4410-120 |
|---|---|---|---|---|
|  |  |  |  |  |
| DS-K3H4420-120 | | DS-KAB671-B Stand Stick | | |
|  | |  | | |

Distributed by

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com