

XVR-116G2



Key Features


- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 16-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coaxial cable

Specifications


Model	XVR-116G2
Video/Audio Input	
Analog Video Input	16-ch, BNC
IP Video Input	8-ch(only IP up to 16ch), each channel up to 8MP
Supported Analog Camera Types	Support AHD input: 5MP@12fps 4MP@15fps 1080P@30fps Support TVI input: 5MP@12fps 4MP@15fps 1080P@30fps Support CVI input: 1080P@30fps 720P@30fps Support CVBS input
Audio Input	1-ch, RCA
Network	
Incoming Bandwidth	40Mbps (up to 56Mbps after all analog camera conversion)

Outgoing Bandwidth	64Mbps	
Remote Users	128	
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE	
Video/Audio Output		
VGA Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
HDMI Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
Audio Output	1-ch, RCA	
Two-way Audio	1-ch, RCA	
Synchronous Playback	16-ch	
Encoding		
Recording Resolution	5MP Lite/4MP Lite /1080P/1080P Lite/720P/D1/CIF	
Recording Frame Rate	Main stream:	Sub stream:
	5MP Lite@6fps	D1@6fps
	4MP Lite@8fps	D1@8fps
	1080P Lite@15fps	D1@6fps
	720P@15fps	D1@10fps
Hard Disk		
SATA	1 SATA interface	
Capacity	Up to 6TB for each HDD	
External Interface		
Network Interface	1RJ45 10M/100M self-adaptive Ethernet Interface	
USB Interface	Rear panel:2 x USB2.0	
Serial Interface	1 x RS485	
General		
Power Supply	12V DC Power Consumption: ≤ 10 W(without HDD)	
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)	
Dimensions(W×D×H)	260mm ×243mm× 39mm (10.1" × 9.6"×1.8")	
Weight (without HDD)	≤1.1 Kg (2.42lb)	

Dimensions

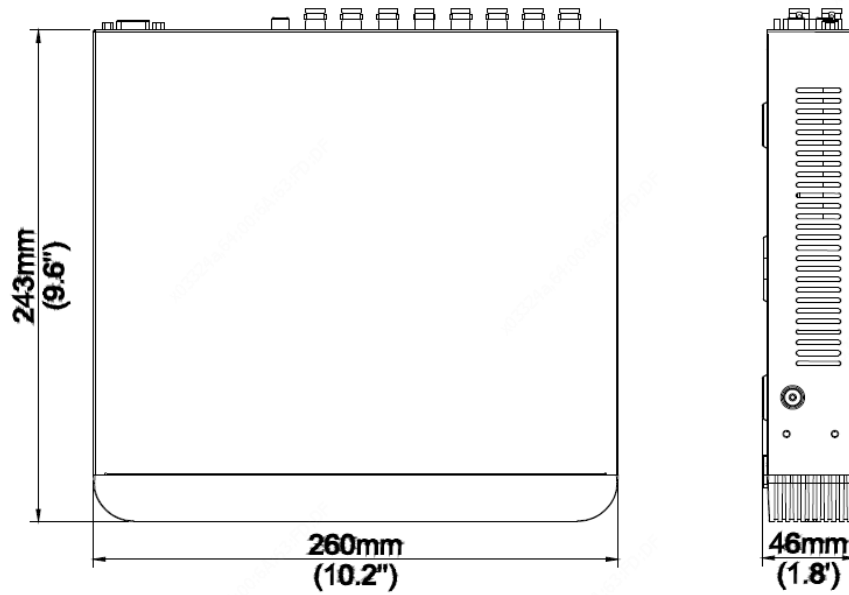

Rear Panel

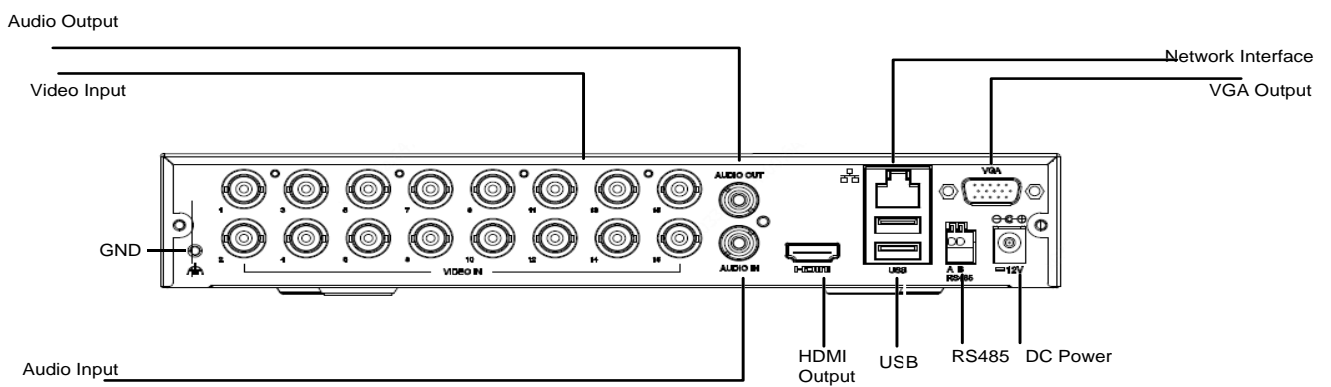

www.uniview.com/uniarch

©2021 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.